

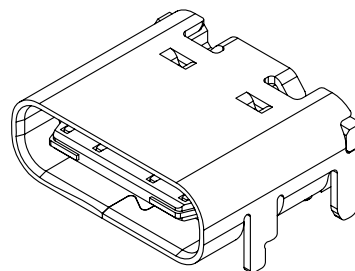



THE PART MEETS TECONN "GP001" COMPLIANCE

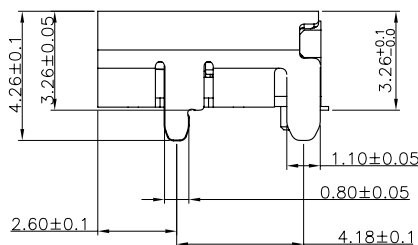

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

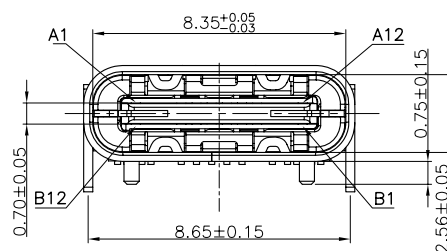

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

W 10 14 G6-A-XX-X

Series -



Pin No.—

Flow No. -

— Packing: R:Tape&Reel & T:tray

01:G/F 03:3U" 05:5U"

10:10U" 15:15U" 30:30U"

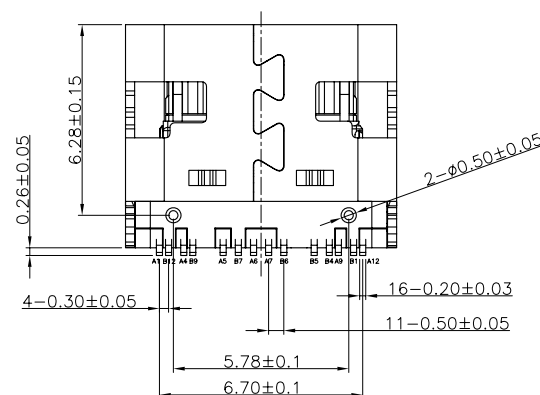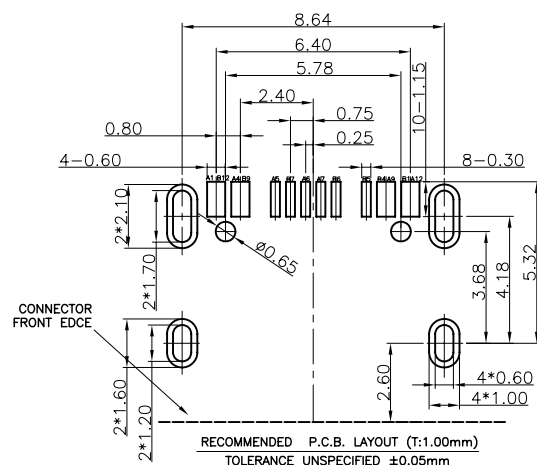

6	SHELL	STAINLESS STEEL	NI/SN Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

X. ± 0.35	APPD: Henry Sun		TITLE: USB C TYPE 母座单排14PIN	 泰康电子 TECOM
.X ± 0.25	CHKD:			
.XX ± 0.15	/			
.XXX $\pm$	/			
X* $\pm$ 2"	DR: Xinxin		PART NO: W1014G6-A-XX-X	
.X* $\pm 1.5"$				
	UNITS: mm	SCALE: 1:1	DWG NO: C-W1014G6-A-XX-X	CUSTOMER DRAWING
				SHEET: 10F REV: A

A	TE2016-XXXX	New Drawing	2016/08/13
REV	ECN NO	DESCRIPTION	DATE