
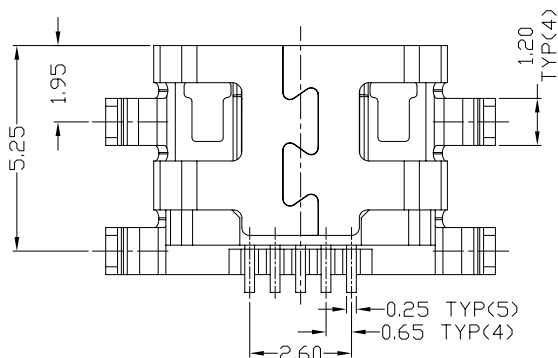

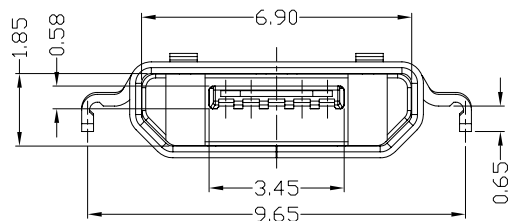

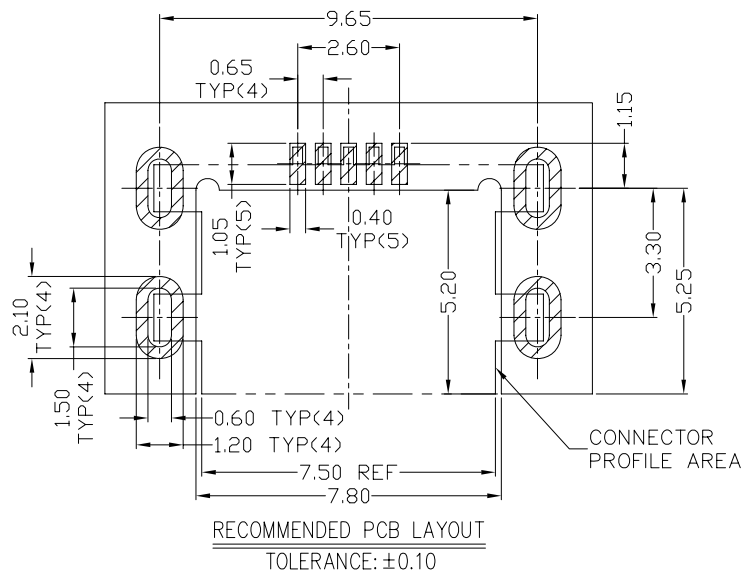


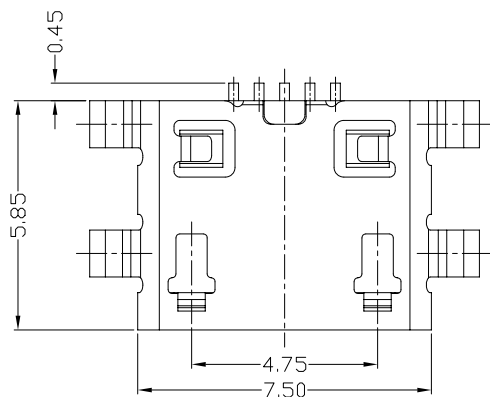

NOTES:
1.PART DESCRIPTION SEE TABLE.
2.NO BURR AND TWIST APPEARS.
3.DETAIL FUNCTION REFER TO PRODUCT SPECIFICATION.

PART NO.	CONTACT FINISH
UBM9110500	CONTACT AREA: 3~5u"Au SOLDER AREA: 3~5u"Au
UBM9110510	CONTACT AREA: 15u"Au SOLDER AREA: 80~120u"Ti

3	SHELL	1	SUS304 THICKNESS=0.30mm	OVER ALL: 30~50u"Ni SOLDER AREA: 3~5u"Au
2	TERMINAL	5	C2680 THICKNESS=0.15mm	OVER ALL: 50~80u" Ni ALL AREA: SEE TABLE
1	HOUSING	1	UL 94V-0, BLACK	30% GLASS FILLED
ITEM	DESCRIPTION	Q'Y	MATERIAL	FINISH

QUALITY SYMBOLS

▼=0 ▽=0 ▽=0

▼ MAJOR DIMENSION
▽ CRITICAL DIM (CPK CONTROL)
▽ CRITICAL DIM (SPC CONTROL)

GENERAL TOLERANCES

3 PLACES(X.XXX) ± ---

2 PLACES(X.XX) ± 0.20


1 PLACE(X.X) ± ---

ANGULAR ± 5°

SCALE 1:1 DESIGN UNITS MM

THIRD ANGLE PROJECTION

FOR CUSTOMER		TITLE	
		1.15H 5PIN 沉板式MICRO USB CONN.	
		PART NO.	SEE TABLE
		DOCUMENT NO.	VE107-031
ECN NO:		V E L A	
DRAW: WANG CG 2014.03.17			
CHECK: BOBNN 2014.03.17			
APPR: BOBNN 2014.03.17		SHEET NO. 1 OF 2	
		REV. X9	

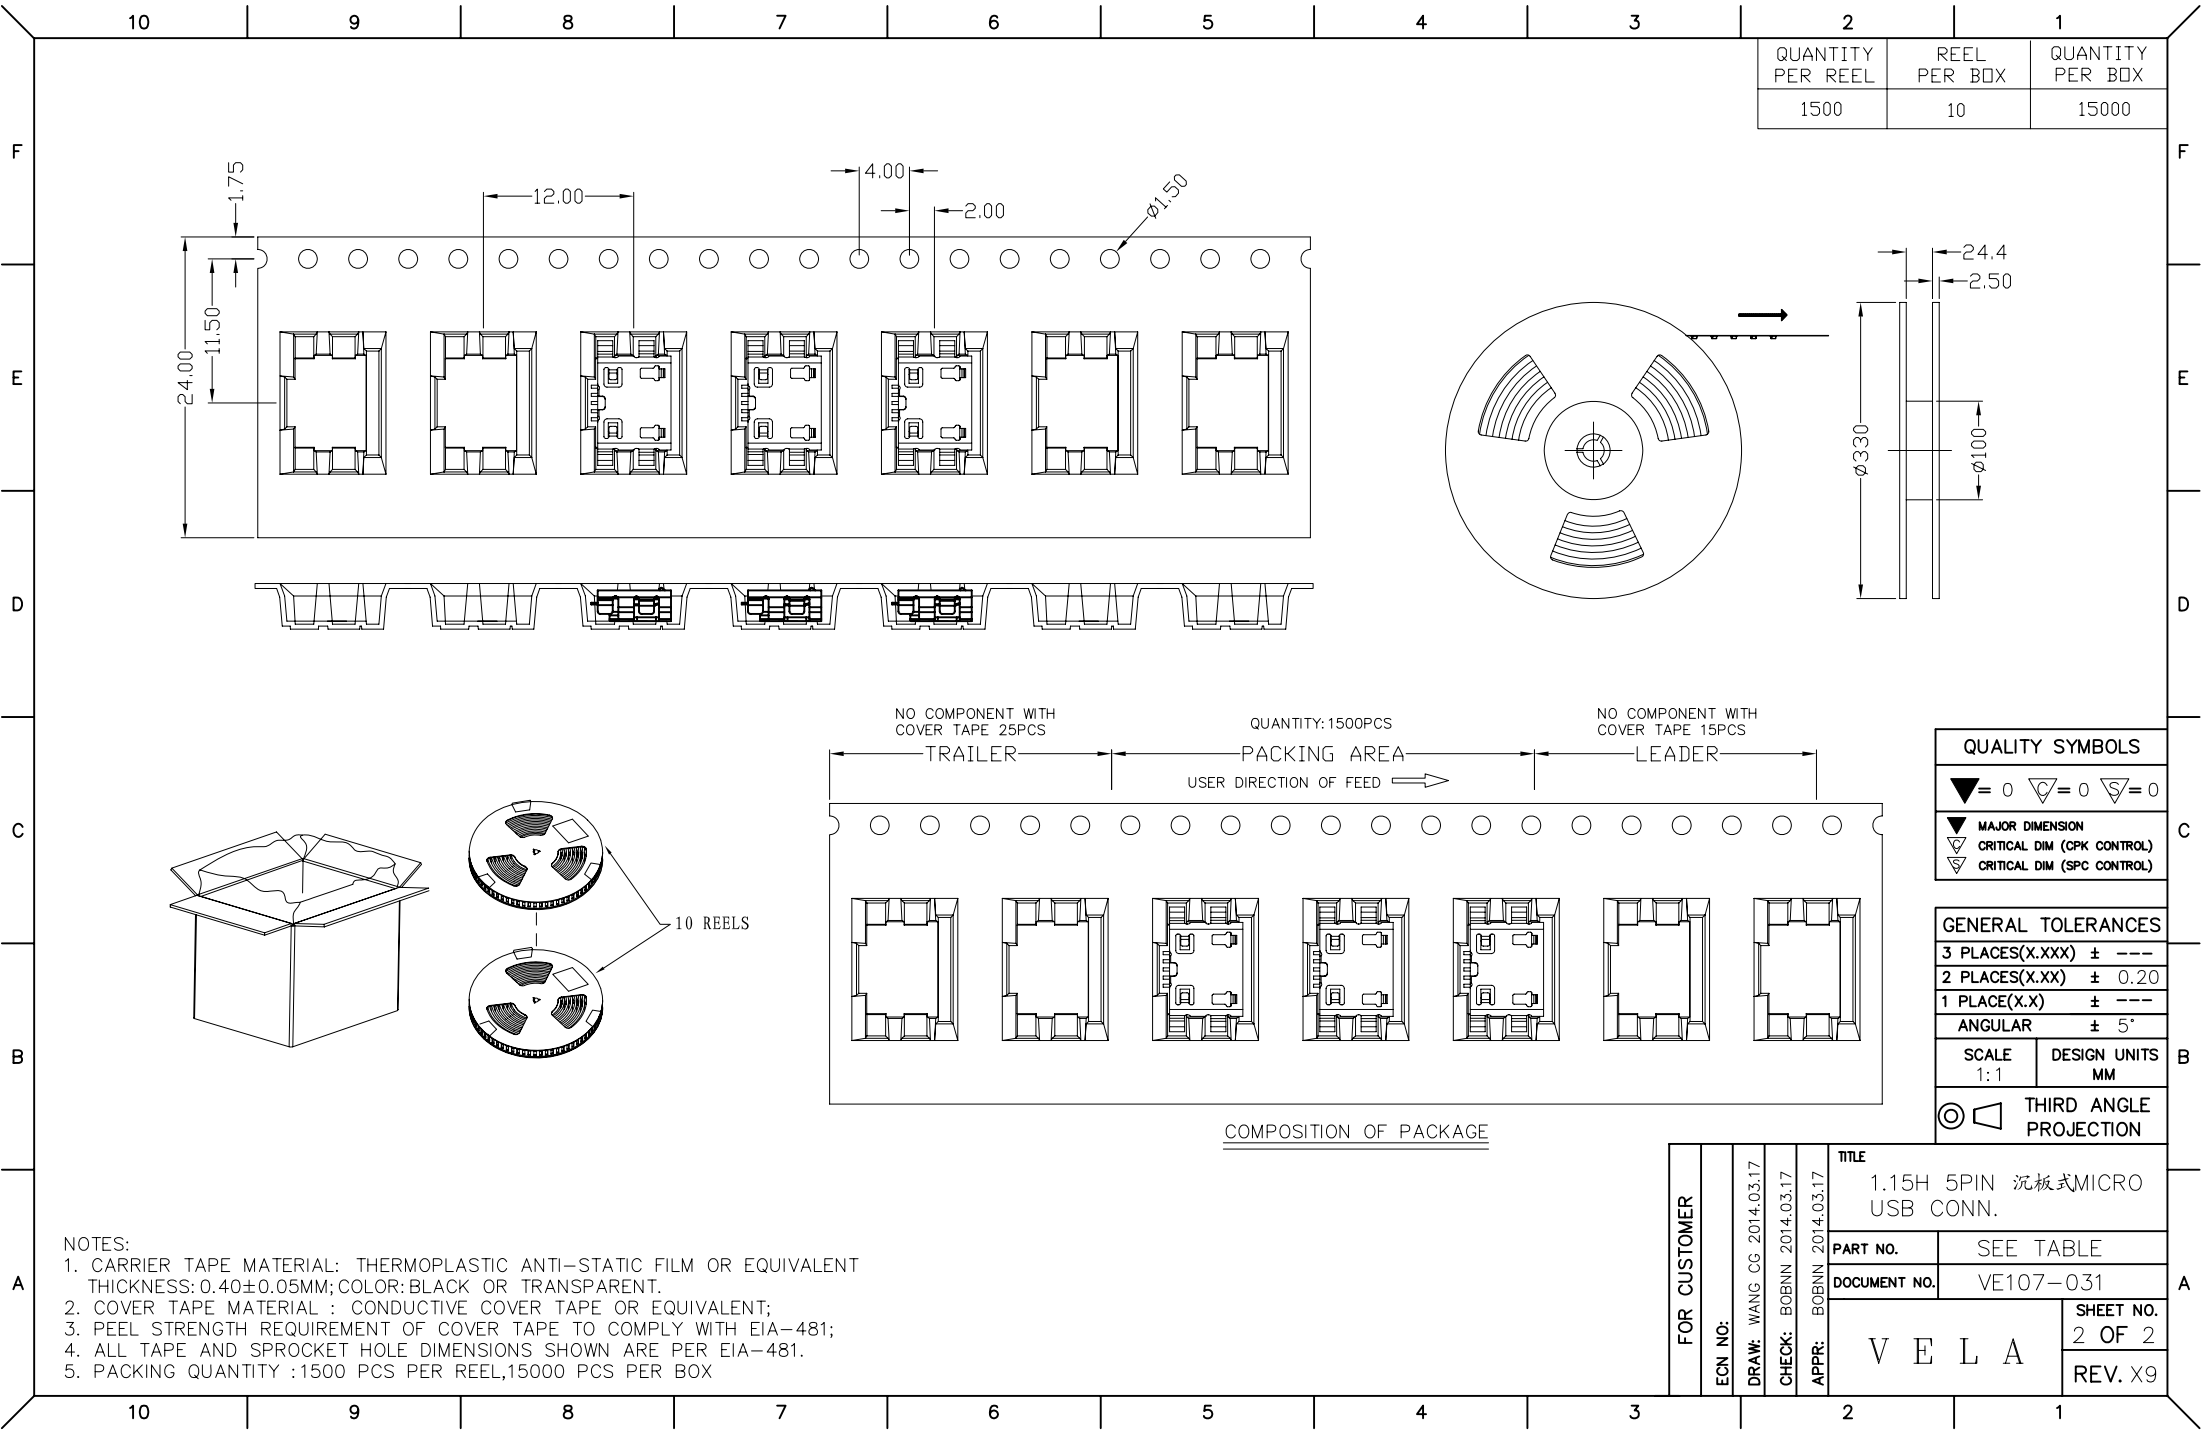

NOTES:
1. CARRIER TAPE MATERIAL: THERMOPLASTIC ANTI-STATIC FILM OR EQUIVALENT
THICKNESS: 0.40±0.05MM; COLOR: BLACK OR TRANSPARENT;
2. COVER TAPE MATERIAL : CONDUCTIVE COVER TAPE OR EQUIVALENT;
3. PEEL STRENGTH REQUIREMENT OF COVER TAPE TO COMPLY WITH EIA-481;
4. ALL TAPE AND SPROCKET HOLE DIMENSIONS SHOWN ARE PER EIA-481.
5. PACKING QUANTITY : 1500 PCS PER REEL, 15000 PCS PER BOX

FOR CUSTOMER	ECN NO:	DRAW: WANG CG 2014.03.17	CHECK: BOBNN 2014.03.17	APPR: BOBNN 2014.03.17	TITLE		
					1.15H 5PIN 沉板式MICRO USB CONN.		
					PART NO.	SEE TABLE	
					DOCUMENT NO.	VE107-031	
					V E L A		SHEET NO.
2 OF 2							
					REV. X9		