
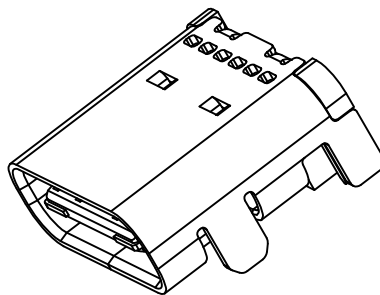






RoHS2.0&REACH Compliant



NOTES:
SPECIFICATION:

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: INITIAL 8N~20N
6~20N AFTER DURABILITY TEST.
8. DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

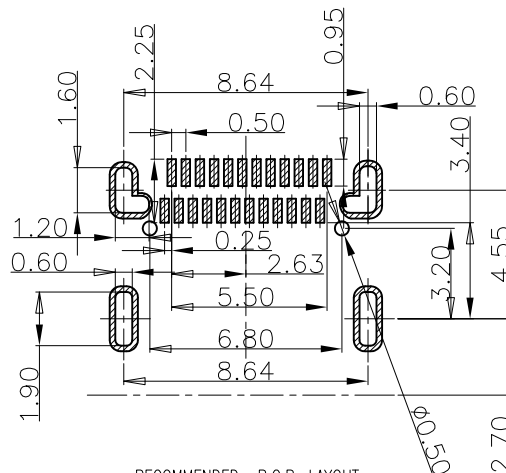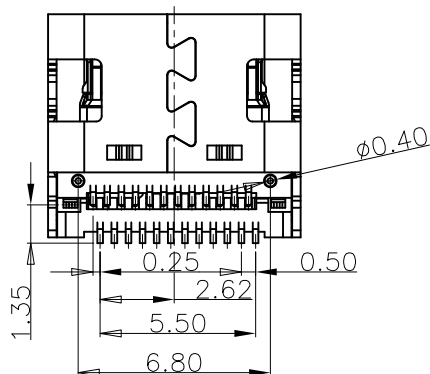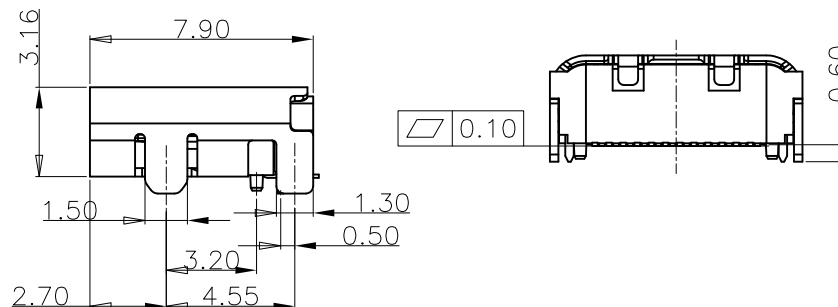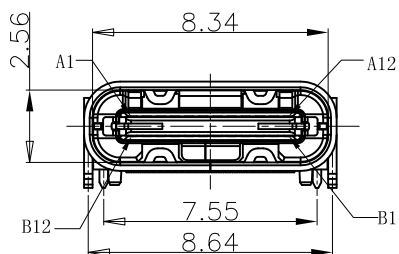

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

PART NO.:W1024C3-A-XX-X

R:Reel
T:Tray

01:G/F 03:3U" 05:5U"
10:10U" 15:15U" 30:30U"

5	SHELL	STAINLESS STEEL	Ni/SN Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	Ni Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
X.	± 0.35	APPD:	Henry Sun	TITLE: USB C TYPE 板上双排贴片母座
.X	± 0.25	CHKD:		
.XX	± 0.15	DR:		
.XXX	±	Cola Lee		
X*	± 2°	PART NO:	W1024C3-A-XX-R	CUSTOMER DRAWING
.X*	± 1.5°	DWG NO:		
UNITS: mm		SCALE: 1:1	C-W1024C3-A-XX-R	SHEET:10F1
				REV: A



A	TE2015-XXXX	New Drawing	2015/09/30
REV	ECN NO	DESCRIPTION	DATE