

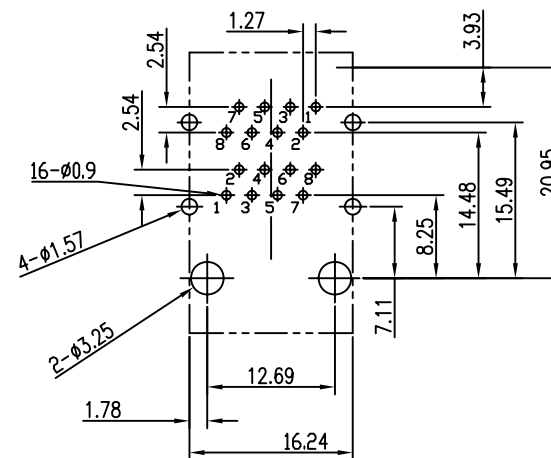
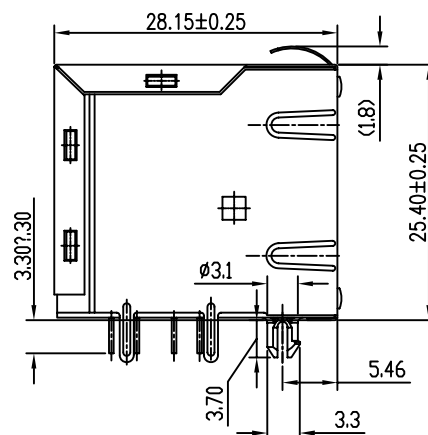
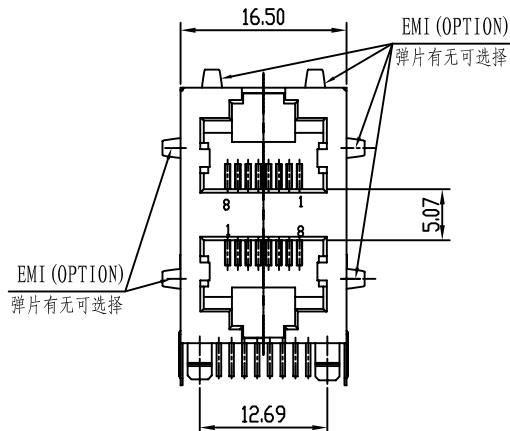


RoHS Compliant

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

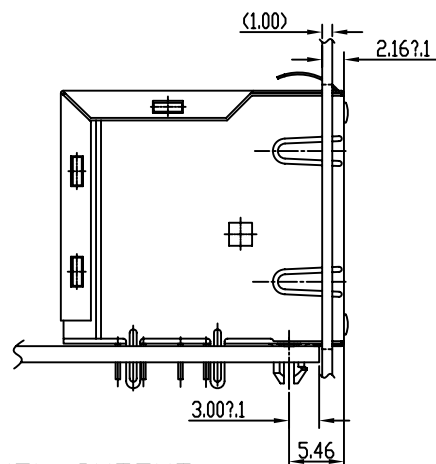

PCB LAYOUT COMPONENT SIDE
THICKNESS=1.6MM

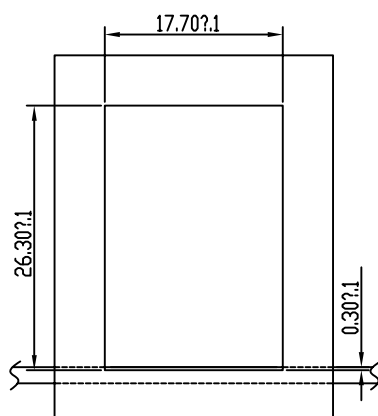

RECOMMENDED PANEL CUTOUT

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 150 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC
- DIELECTRIC STRENGTH : 1000V D.C. OR A.C. PEAK; ONE CONTACT TO ALL OTHER CONTACTS CONNECTED TOGETHER.
1500V D.C. OR A.C. PEAK; ALL CONTACTS CONNECTED TOGETHER TO SHIELD,
(HOUSING/MOUNTING PLATE) IF PRESENT.

MECHANICAL:

- HOUSING&INSERT& MATERIAL : PA66 Black UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
- PLATING : 1: CONTACT AREA- GOLD PLATING 30u".
2: TAILS PLATING TIN OVER NICKEL.
- SHIELD : BRASS T=0.2mm PLATED NICKEL FOR ALL.
- OPERATING LIFE : 750 CYCLES .
- MATING/UNMATING FORCE: : 30N Max.
- RETENTION STRENGTH: : 50N FOR 60S±5S.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C RELATIVE HUMIDITY<80%.
- OPERATION : -40°C TO +85°C.
- STORAGE TIME LIMIT:12 MONTHS.

REV	ECN NO	DESCRIPTION	DATE
A	TE2018-XXXX	New Drawing	2018/03/13

TOLERANCES 0~15±0.15 15~30±0.2 >30±0.25 ANGLES:±1°	X. ± /	APPD: Henry	TITLE: RJ45 2X1PORT PCB JACK 8P8C WITH SPRING	PART NO: 10230788F011	DWG NO: C-10230788F011	CUSTOMER DRAWING	SHEET:10F1	REV: A
	.X ± /	CHKD: /						
	.XX ± /	DR: Zhangjing						
	.XXX ± /							
	X* ± /		UNITS: mm	SCALE: N/A				

