


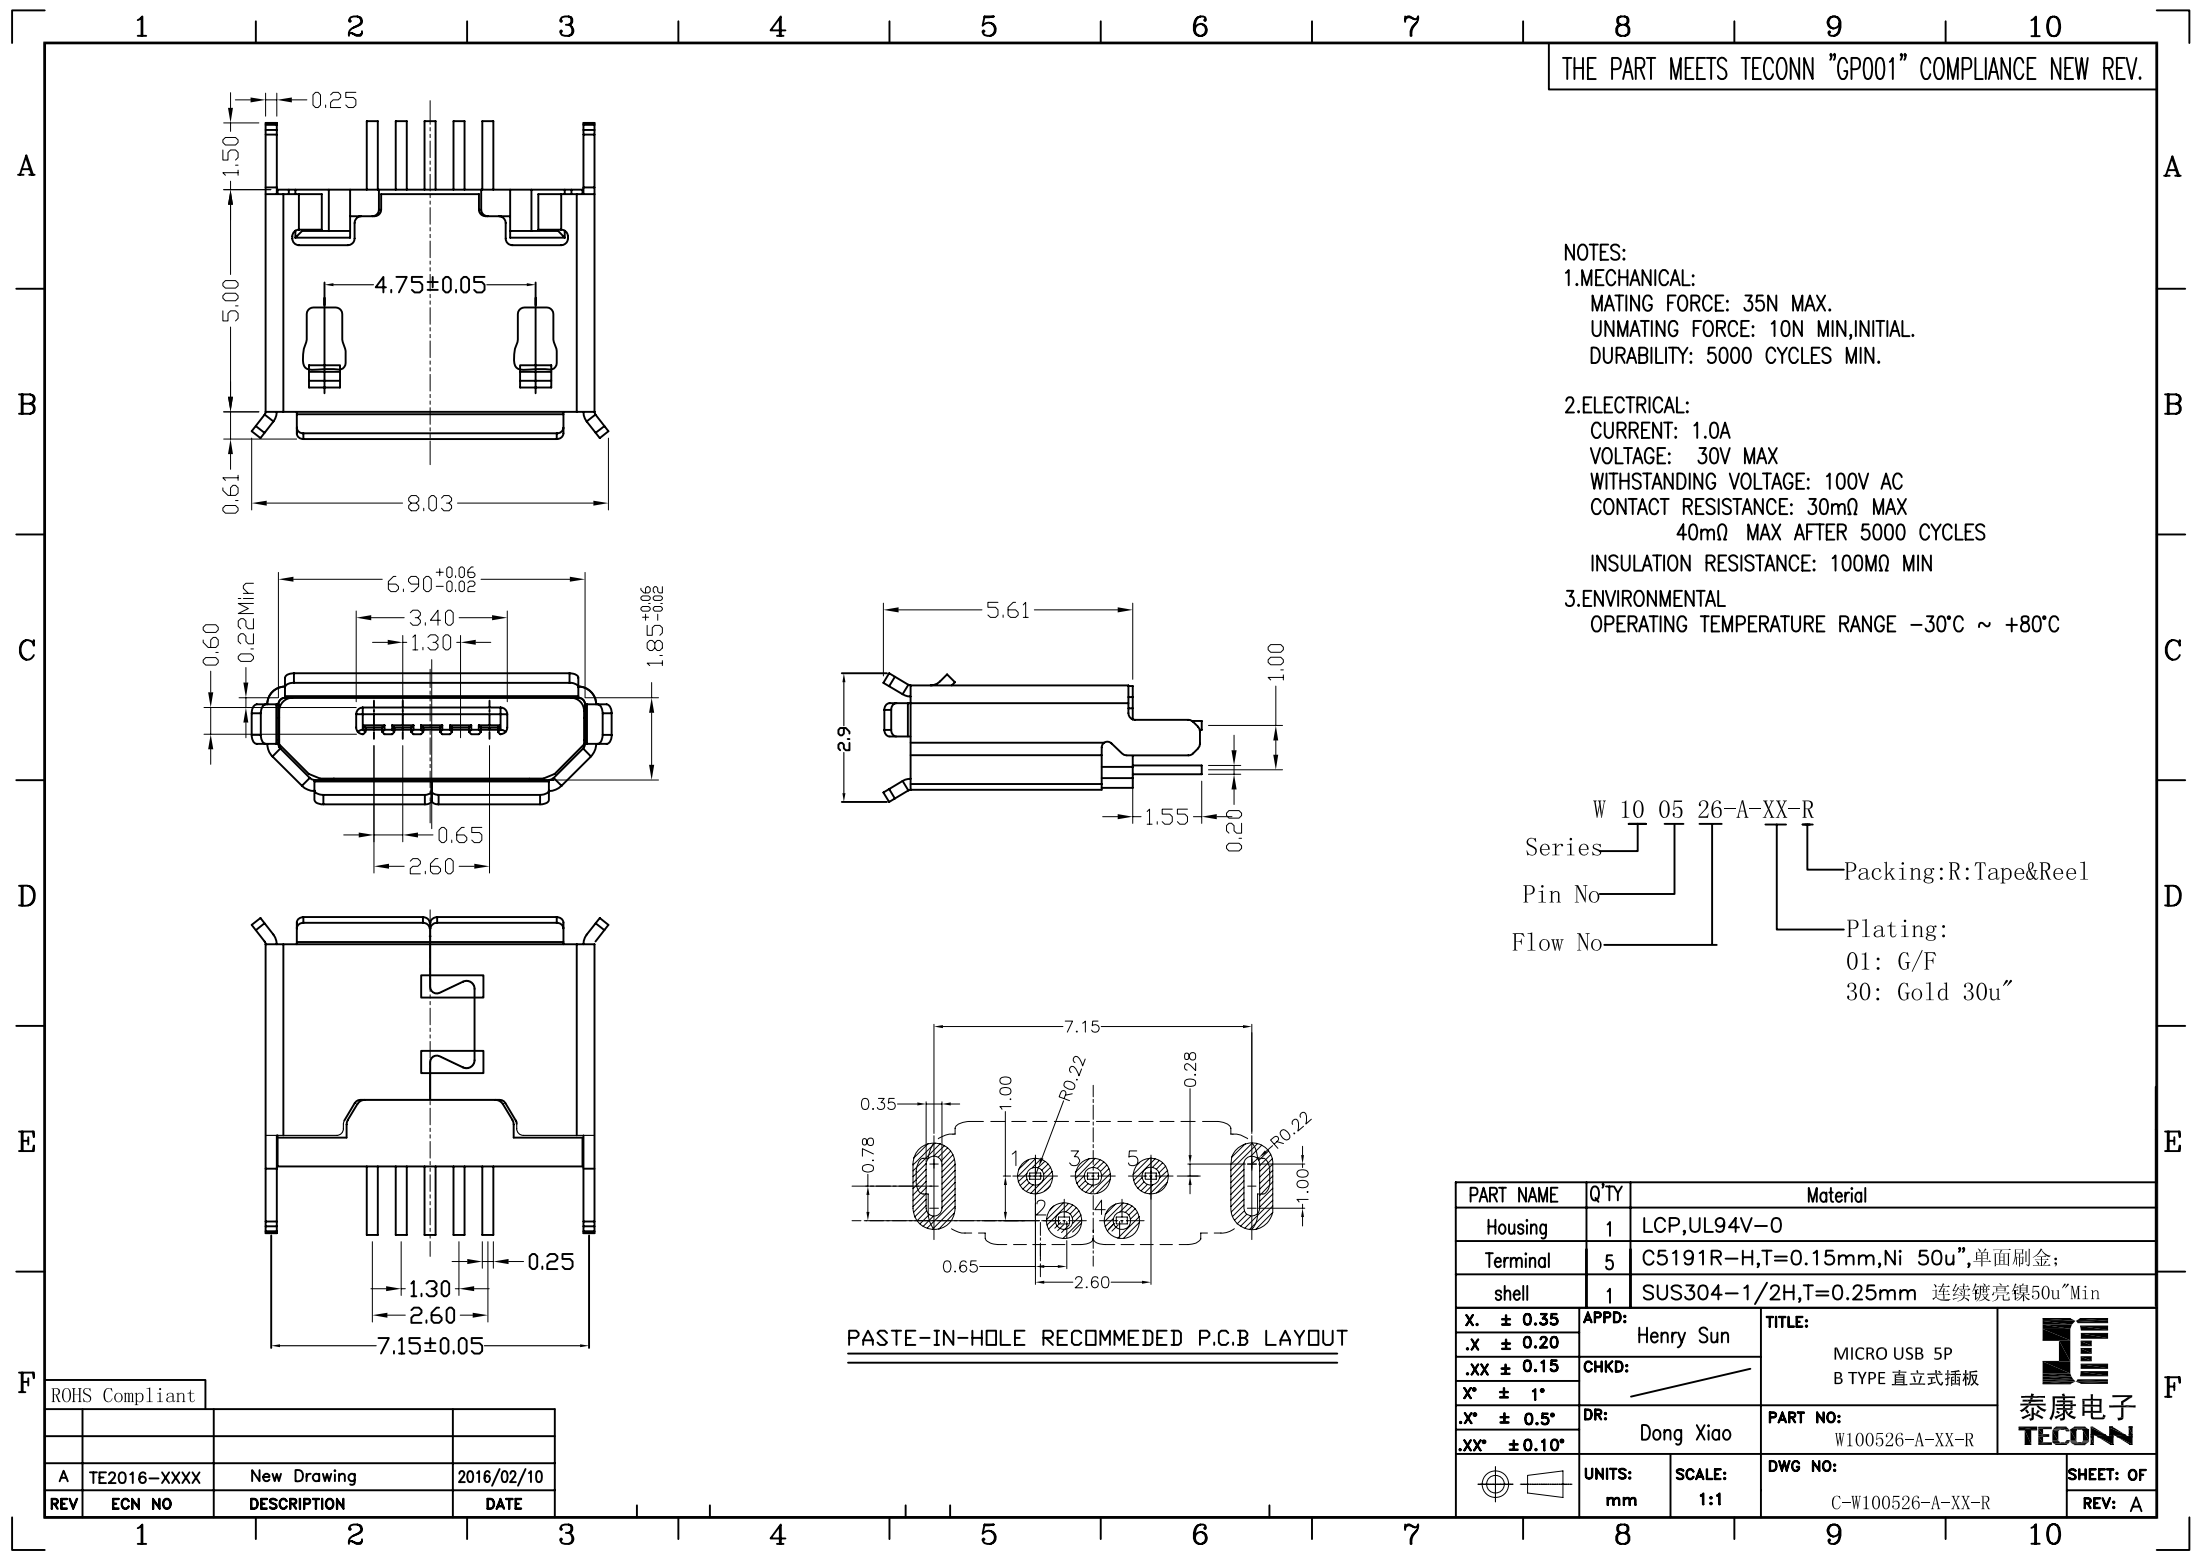

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

- NOTES:
- 1.MECHANICAL:
MATING FORCE: 35N MAX.
UNMATING FORCE: 10N MIN,INITIAL.
DURABILITY: 5000 CYCLES MIN.
- 2.ELECTRICAL:
CURRENT: 1.0A
VOLTAGE: 30V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 30mΩ MAX
40mΩ MAX AFTER 5000 CYCLES
INSULATION RESISTANCE: 100MΩ MIN
- 3.ENVIRONMENTAL
OPERATING TEMPERATURE RANGE -30°C ~ +80°C

W 10 05 26-A-XX-R


Series

Pin No

Flow No

Packing:R:Tape&Reel

Plating:
01: G/F
30: Gold 30u"

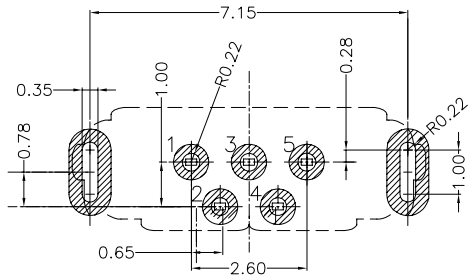

PASTE-IN-HOLE RECOMMENDED P.C.B LAYOUT

PART NAME		Q'TY	Material	
Housing		1	LCP,UL94V-0	
Terminal		5	C5191R-H,T=0.15mm,Ni 50u",单面刷金;	
shell		1	SUS304-1/2H,T=0.25mm 连续镀亮镍50u"Min	
X. ± 0.35	APPD:	Henry Sun	TITLE: MICRO USB 5P B TYPE 直立式插板	
.X ± 0.20	CHKD:			
.XX ± 0.15	DR:	Dong Xiao	PART NO: W100526-A-XX-R	
X° ± 1°				
.X° ± 0.5°			DWG NO: C-W100526-A-XX-R	
.XX° ± 0.10°				
UNITS: mm		SCALE: 1:1		SHEET: OF REV: A

ROHS Compliant			
REV	ECN NO	DESCRIPTION	DATE
A	TE2016-XXXX	New Drawing	2016/02/10

