

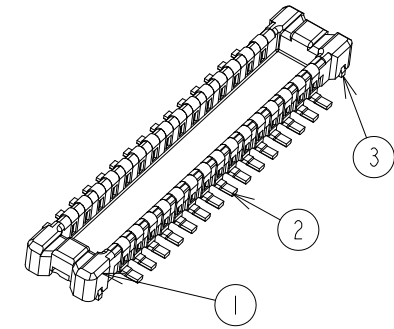
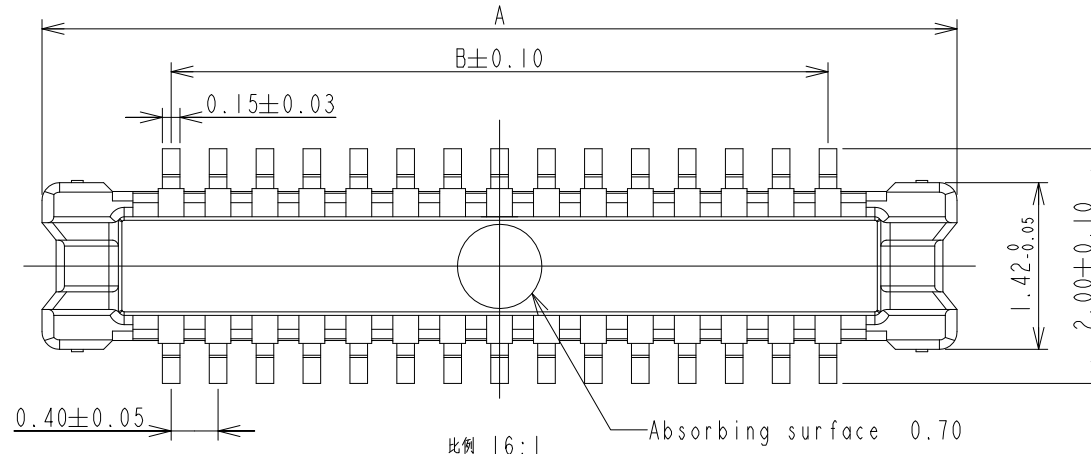



REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKD	APPROVED
A	ECN140502	NEW	10/21/15	SEAN	SEAN	SEAN

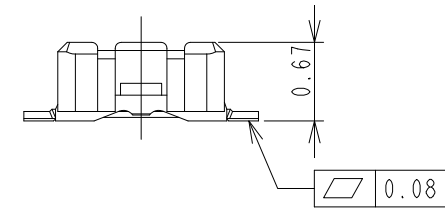

比例 8:1

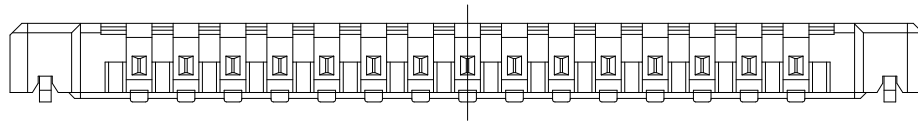

Terminal And hood down

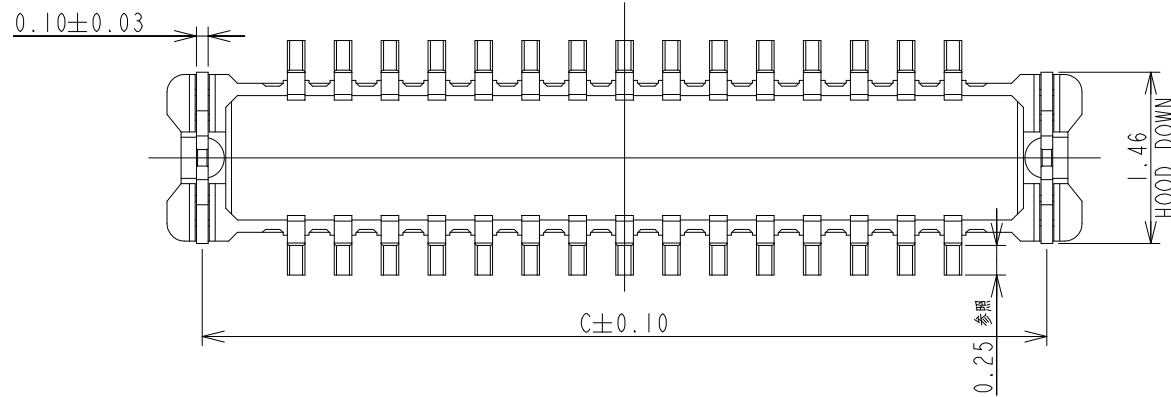

3	HOOD DOWN	2	Copper Alloy	PLATING Matte Sn 70-150u"
2	CONTACT		Copper Alloy	4u" GOLD PLATING ON CONTACT AREA, 2u" GOLD PLATING ON SOLDER AREA
1	HOUSING	1	High Temperature Plastic	BLACK
ITEM	NAME	Q'TY	MATERIAL	REMARK/FINISH



ELECTRIC
CONNECTOR
TECHNOLOGY

GENERAL TOLERANCE	
X. ±0.40	
.X ±0.25	X.° ±3.0°
.XX ±0.15	.X° ±2.0°
.XXX ±0.10	.XX° ±1.0°

SCALE:

UNIT:

mm

SIZE:

A4



DRAWN

SEAN

DATE

10/21/15

CHECK

DATE

APPROVE

DWG. NO.

600-3048-01

PARTS NO.(INTENDED USE)

SEE TABLE A

TITLE

CUSTOMER DRAWING

BTB CONN P0.4 H0.80 30 Pin PLUG


REV.

A

SHEET

1 / 2


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKD	APPROVED
A	ECN141502	NEW	10/21/15	SEAN	SEAN	SEAN

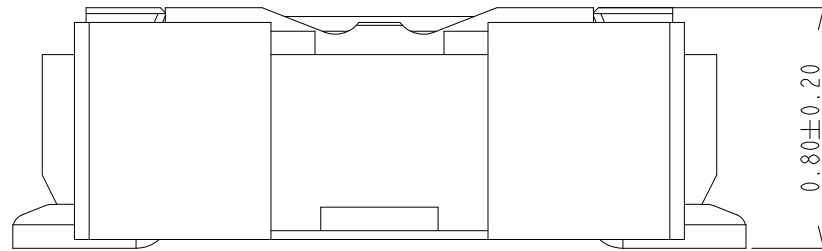

比例 40:1
Cooperate with highly

NOTES:

- 1.0: RATING:
- 1.1: VOLTAGE: 60V AC/DC
- 1.2: CURRENT: 0.3A/PIN
- 1.3: OPERATION TEMPERATURE: -55°C TO -85°C
- 2.0: ELECTRICAL CHARACTERISTIC:
- 2.1: CONTACT RESISTANCE: 90mΩ MAX INTIAL
- 2.2: INSULATION RESISTANCE: 1000MΩ MIN INTIAL
- 2.3: DIELECTIC WITHSTANDING VOLTAGE: 150V AC FOR ONE MINUTE
- 3.0: MECHANICAL PERFORMANCE:
- 3.1: DURABILITY:30 CYCLES

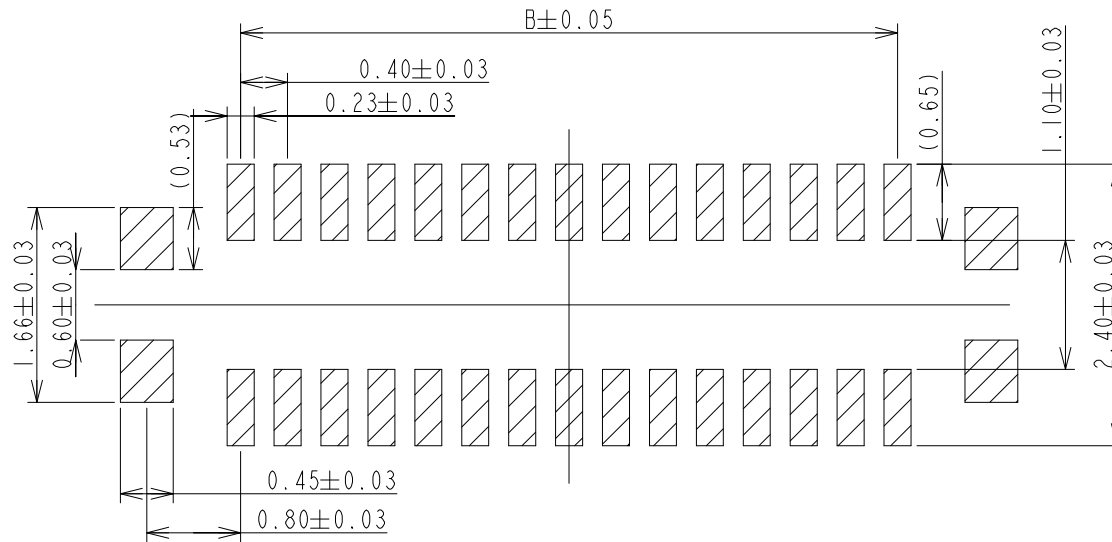

比例 16:1

TABLE A

PIN	PART NO.	A	B	C
10	818003839	3.80	1.60	3.20
14	818010621	4.60	2.40	4.00
24	818003841	6.60	4.40	6.00
30	818003048	7.80	5.60	7.20
34	818003843	8.60	6.40	8.00
40	818003845	9.80	7.60	9.20
50	818003847	11.80	9.60	11.20



ELECTRIC
CONNECTOR
TECHNOLOGY

GENERAL TOLERANCE	
X. ±0.40	
.X ±0.25	X.° ±3.0°
.XX ±0.15	.X° ±2.0°
.XXX ±0.10	.XX° ±1.0°

SCALE:

UNIT:

mm

SIZE:

A4



DRAWN SEAN

CHECK

APPROVE

DATE 10/21/15

DATE

DATE

DWG. NO.

600-3048-01

PARTS NO.(INTENDED USE)

SEE TABLE A

TITLE

CUSTOMER DRAWING

BTB CONN P0.4 H0.80 30 Pin PLUG

REV.

A

SHEET

2 / 2