

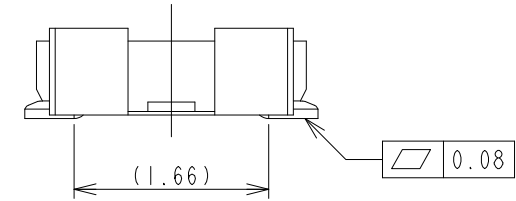

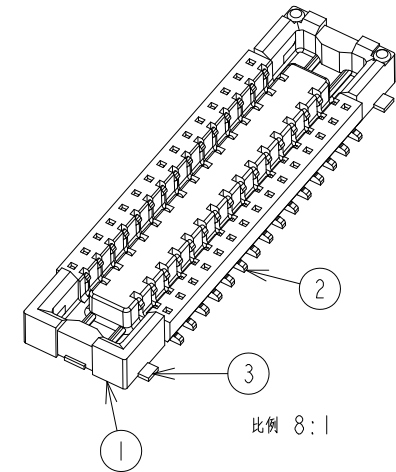


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKD	APPROVED
A	PDR15XXX	NEW	10/21/15'	SEAN	SEAN	SEAN

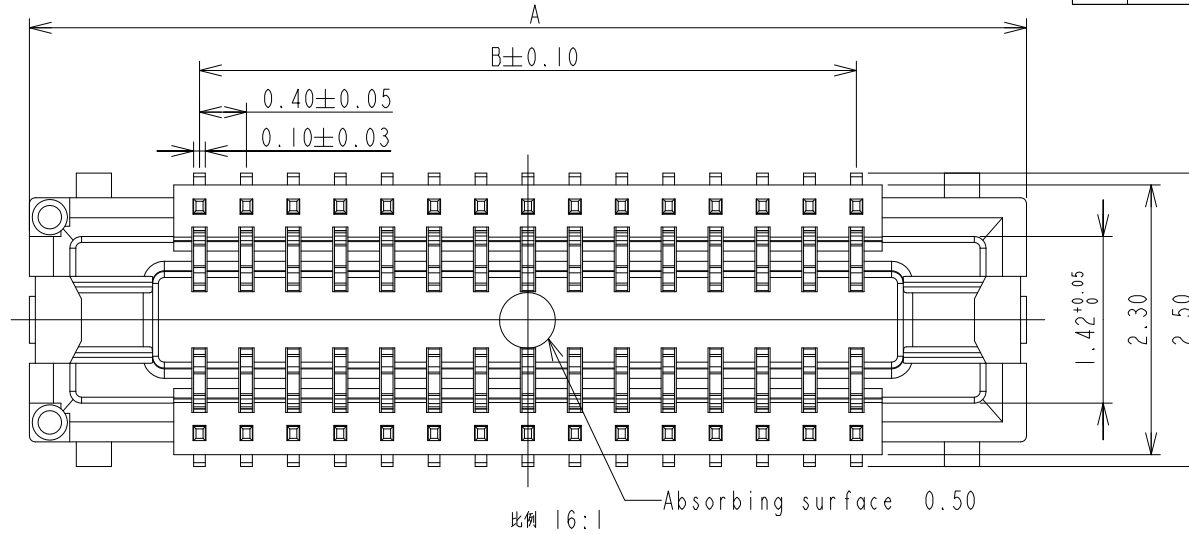

Terminal And hood down

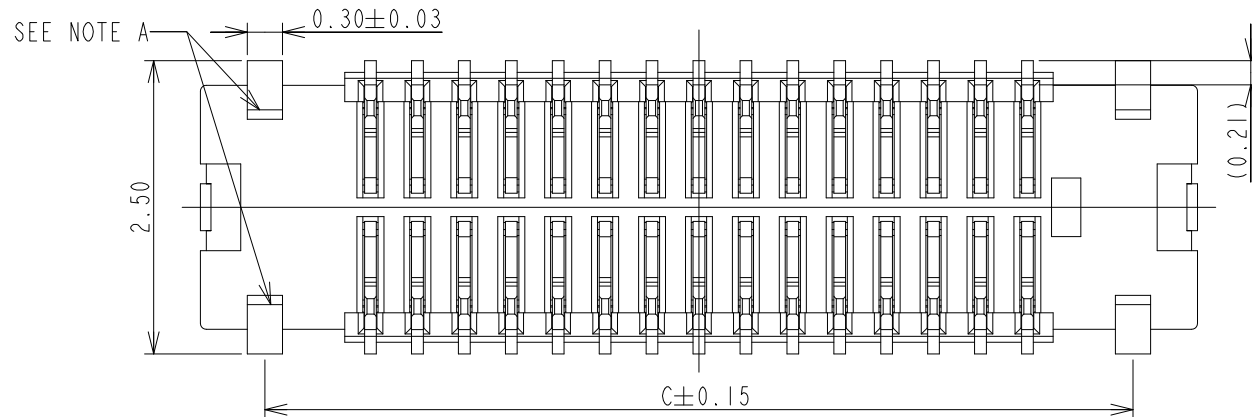

NOTE A: Hood down for conducting connection

3	HOOD DOWN	2	Copper Alloy	PLATING Matte Sn 70-150u"
2	CONTACT		Copper Alloy	4u" GOLD PLATING ON CONTACT AREA, 2u" PLATING ON SOLDER AREA
1	HOUSING	1	High Temperature Plastic	BLACK
ITEM	NAME	Q'TY	MATERIAL	REMARK/FINISH



ELECTRIC
CONNECTOR
TECHNOLOGY

GENERAL TOLERANCE	
X. ±0.40	
.X ±0.25	X.° ±3.0°
.XX ±0.15	.X° ±2.0°
.XXX ±0.10	.XX° ±1.0°

SCALE:

UNIT:

mm

SIZE:

A4



DRAWN

SEAN

DATE

10/21/15'

DATE

DWG. NO.

600-3049-01

PARTS NO. (INTENDED USE)

SEE TABLE A

TITLE

CUSTOMER DRAWING

BTB RECEPTOR
P0.4*H0.80 SERIES

REV.


A

SHEET

1 / 2


NOTES:

- 1.0: RATING:
- 1.1: VOLTAGE: 60V AC/DC
- 1.2: CURRENT: 0.3A/PIN
- 1.3: OPERATION TEMPERATURE: -55°C TO -85°C
- 2.0: ELECTRICAL CHARACTERISTIC:
- 2.1: CONTACT RESISTANCE: 90mΩ MAX INITIAL
- 2.2: INSULATION RESISTANCE: 1000MΩ MIN INITIAL
- 2.3: DIELECTRIC WITHSTANDING VOLTAGE: 150V AC FOR ONE MINUTE
- 3.0: MECHANICAL PERFORMANCE:
- 3.1: DURABILITY: 30 CYCLES

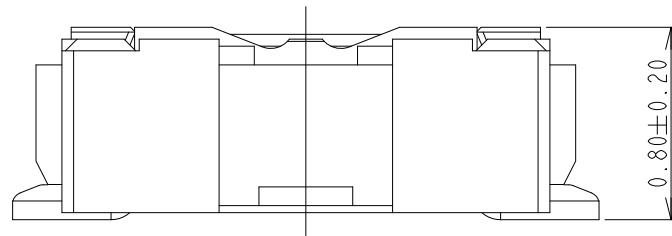

比例 32:1

Cooperate with highly

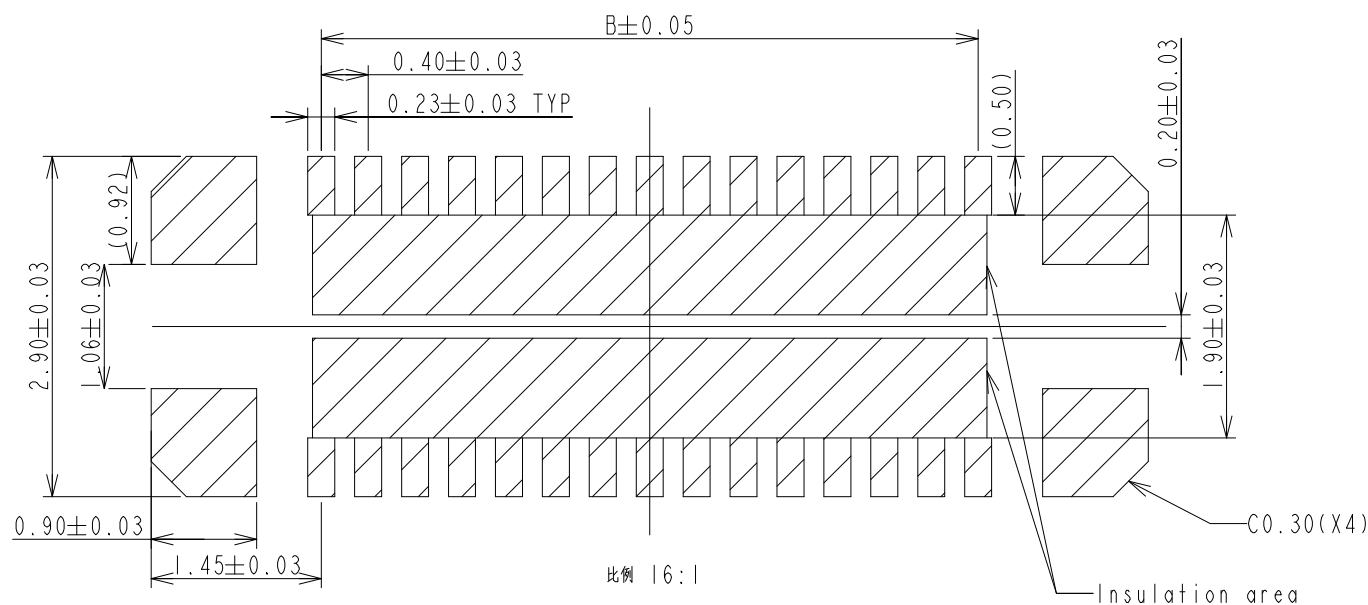

RECOMMEND P.C.B PATTERN DIMENSION (TOP VIEW)

PIN	PART NO.	A	B	C
10	818003840	4.50	1.60	3.40
14	818010622	5.30	2.40	4.20
24	818003842	7.30	4.40	6.20
30	818003049	8.50	5.60	7.40
34	818003844	9.30	6.40	8.20
40	818003846	10.50	7.60	9.40
50	818003848	12.50	9.60	11.40

ELECTRIC
CONNECTOR
TECHNOLOGY

GENERAL TOLERANCE		SCALE:		DRAWN	DATE	DWG. NO.	TITLE CUSTOMER DRAWING BTB RECEP CONN P0.4*H0.80 SERIES	REV.	
X. ±0.40		UNIT: mm		SEAN	10/21/15'	600-3049-01		A	
.X ±0.25	X.° ±3.0°			CHECK	DATE			PARTS NO.(INTENDED USE) SEE TABLE A	SHEET
.XX ±0.15	.X° ±2.0°			APPROVE	DATE				2 / 2
.XXX ±0.10	.XX° ±1.0°	SIZE:	A4						