

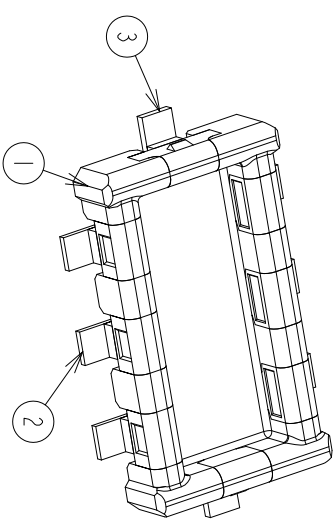
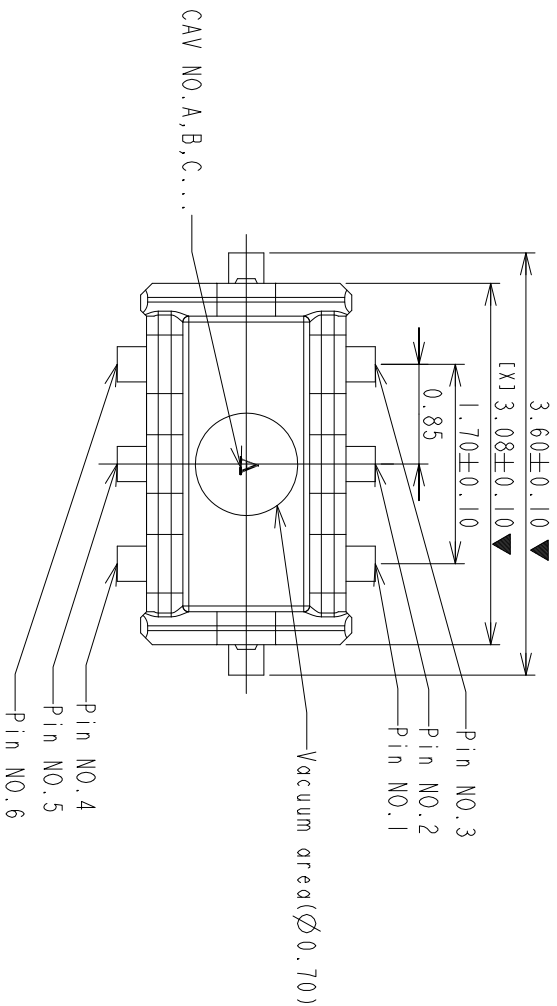



REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKD	APPROVED
A	ECN161816	NEW RELEASE	09/27/16'	ADDY		SEAN
B	ECN170996	AX01 AX01	01/21/17'	ADDY		SEAN



比例 16:1

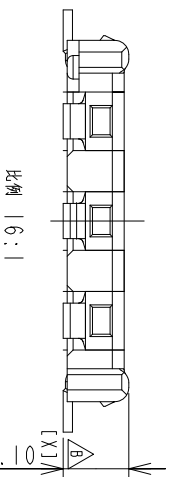

比例 16:1

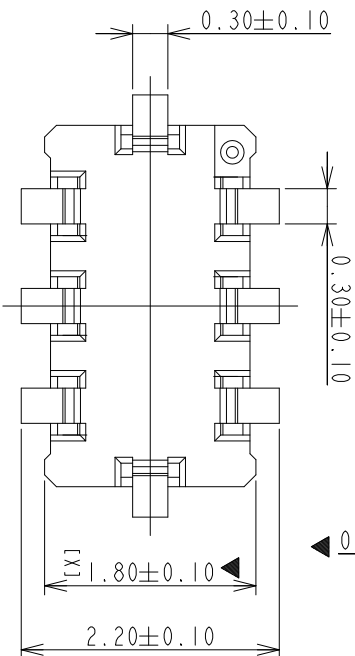

4

3	HOOD DOWN	714079102	2	Copper Alloy	
2	CONTACT	714079101	6	Copper Alloy	
1	HOUSING	724079201	1	High Temperature Plastic	
NO.	Part Name	P/N	Q'TY	Description	Remark

GENERAL TOLERANCE

SCALE:

DRAWN

ADDY

DATE

DWG. NO.

TITLE

REV.

X. ± 0.20

X. ± 0.10

X. $\pm 2.0^\circ$

UNIT:

CHECK

DATE

600-4079-01

COMPONENT DRAWING

B

ELECTRIC
CONNECTOR
TECHNOLOGY

.X ± 0.10

X. $\pm 2.0^\circ$

UNIT:

CHECK

DATE

PARTS NO. (INTENDED USE)

BTB BATTERY H0.6 6P PLUG

SHEET

TECHNOLOGY

.XX ± 0.05

X. $\pm 1.0^\circ$

UNIT:

CHECK

DATE

818004079

BTB BATTERY H0.6 6P PLUG

1 / 2

.XXX ± 0.03

X. $\pm 0.5^\circ$

UNIT:

CHECK

DATE

818004079

BTB BATTERY H0.6 6P PLUG

1 / 2

A

B


C

D

E

F

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKD	APPROVED
A	ECN161816	NEW RELEASE	09/27/16'	ADDY		SEAN
B	ECN170996	A/X01 AX01	01/21/17'	ADDY		SEAN

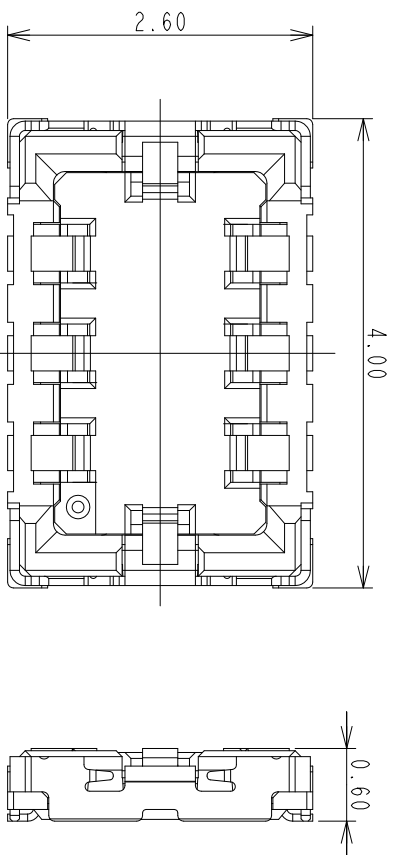


Cooperate with highly

比例 16:1

NOTES:

- 1.0: RATING:
- 1.1: VOLTAGE: 30V AC/DC
- 1.2: CURRENT: SIGNAL Pin 1A/PIN ,POWER Pin 4A/Pin
- 1.3: OPERATION TEMPERATURE: -25°C TO -85°C
- 2.0: ELECTRICAL CHARACTERISTIC:
- 2.1: CONTACT RESISTANCE: 20mΩ MAX INTIAL
- 2.2: INSULATION RESISTANCE: 1000MΩ MIN INTIAL
- 2.3: DIELECTRIC WITHSTANDING VOLTAGE: 200V AC FOR ONE MINUTE
- 3.0: MECHANICAL PERFORMANCE:
- 3.1: DURABILITY:10 CYCLES 40mΩ MAX,1000 CYCLES 100mΩ
- 4.1: " "DIMENSION: CRITICAL DIMENSION
- 4.2: " [X] "DIMENSION: CPK DIMENSION
- 5.1: CONTACT PLATING
- CONTACT POINT: AU 4u" MIN
- SOLDERING POINT: AU 2u" MIN
- UNDER PLATING NI 50u" MIN
- 6.1: HOUSING MATERIAL
- NO REGRIND PLASTIC PERMITTED

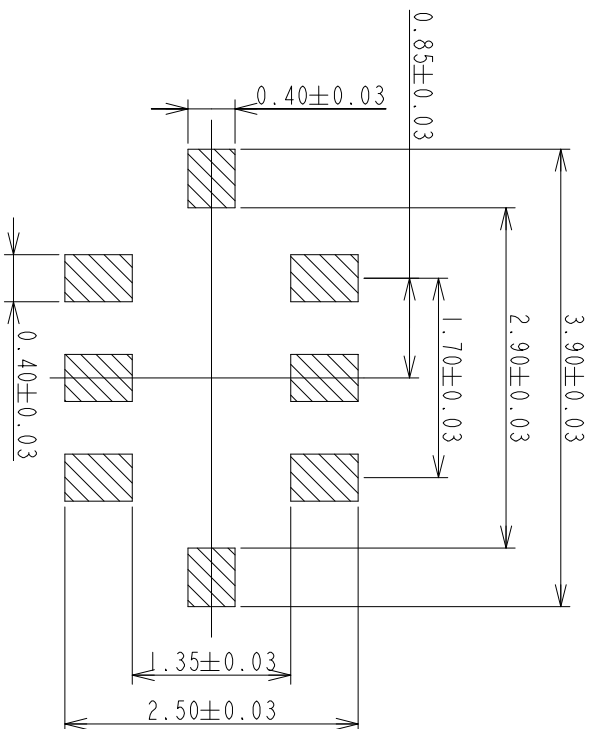

RECOMMEND P.C.B PATTERN DIMENSION (TOP VIEW)

比例 16:1

GENERAL TOLERANCE

SCALE: 16:1

DRAWN ADDY

DATE 04/05/17'

DWG. NO. 600-4079-01

TITLE

REV. B



ELECTRIC
CONNECTOR
TECHNOLOGY

X. ±0.20	X. ° ±2.0°
.X ±0.10	.X ° ±1.0°
.XX ±0.05	.XX ° ±0.5°
XXX ±0.03	.XX° ±0.5°

UNIT: mm
SIZE: A4

CHECK
APPROVE

DATE
DATE

PARTS NO.(INTENDED USE)
818004079

COMPONENT DRAWING
BTB BATTERY H0.6 6P PLUG

SHEET
2 / 2