


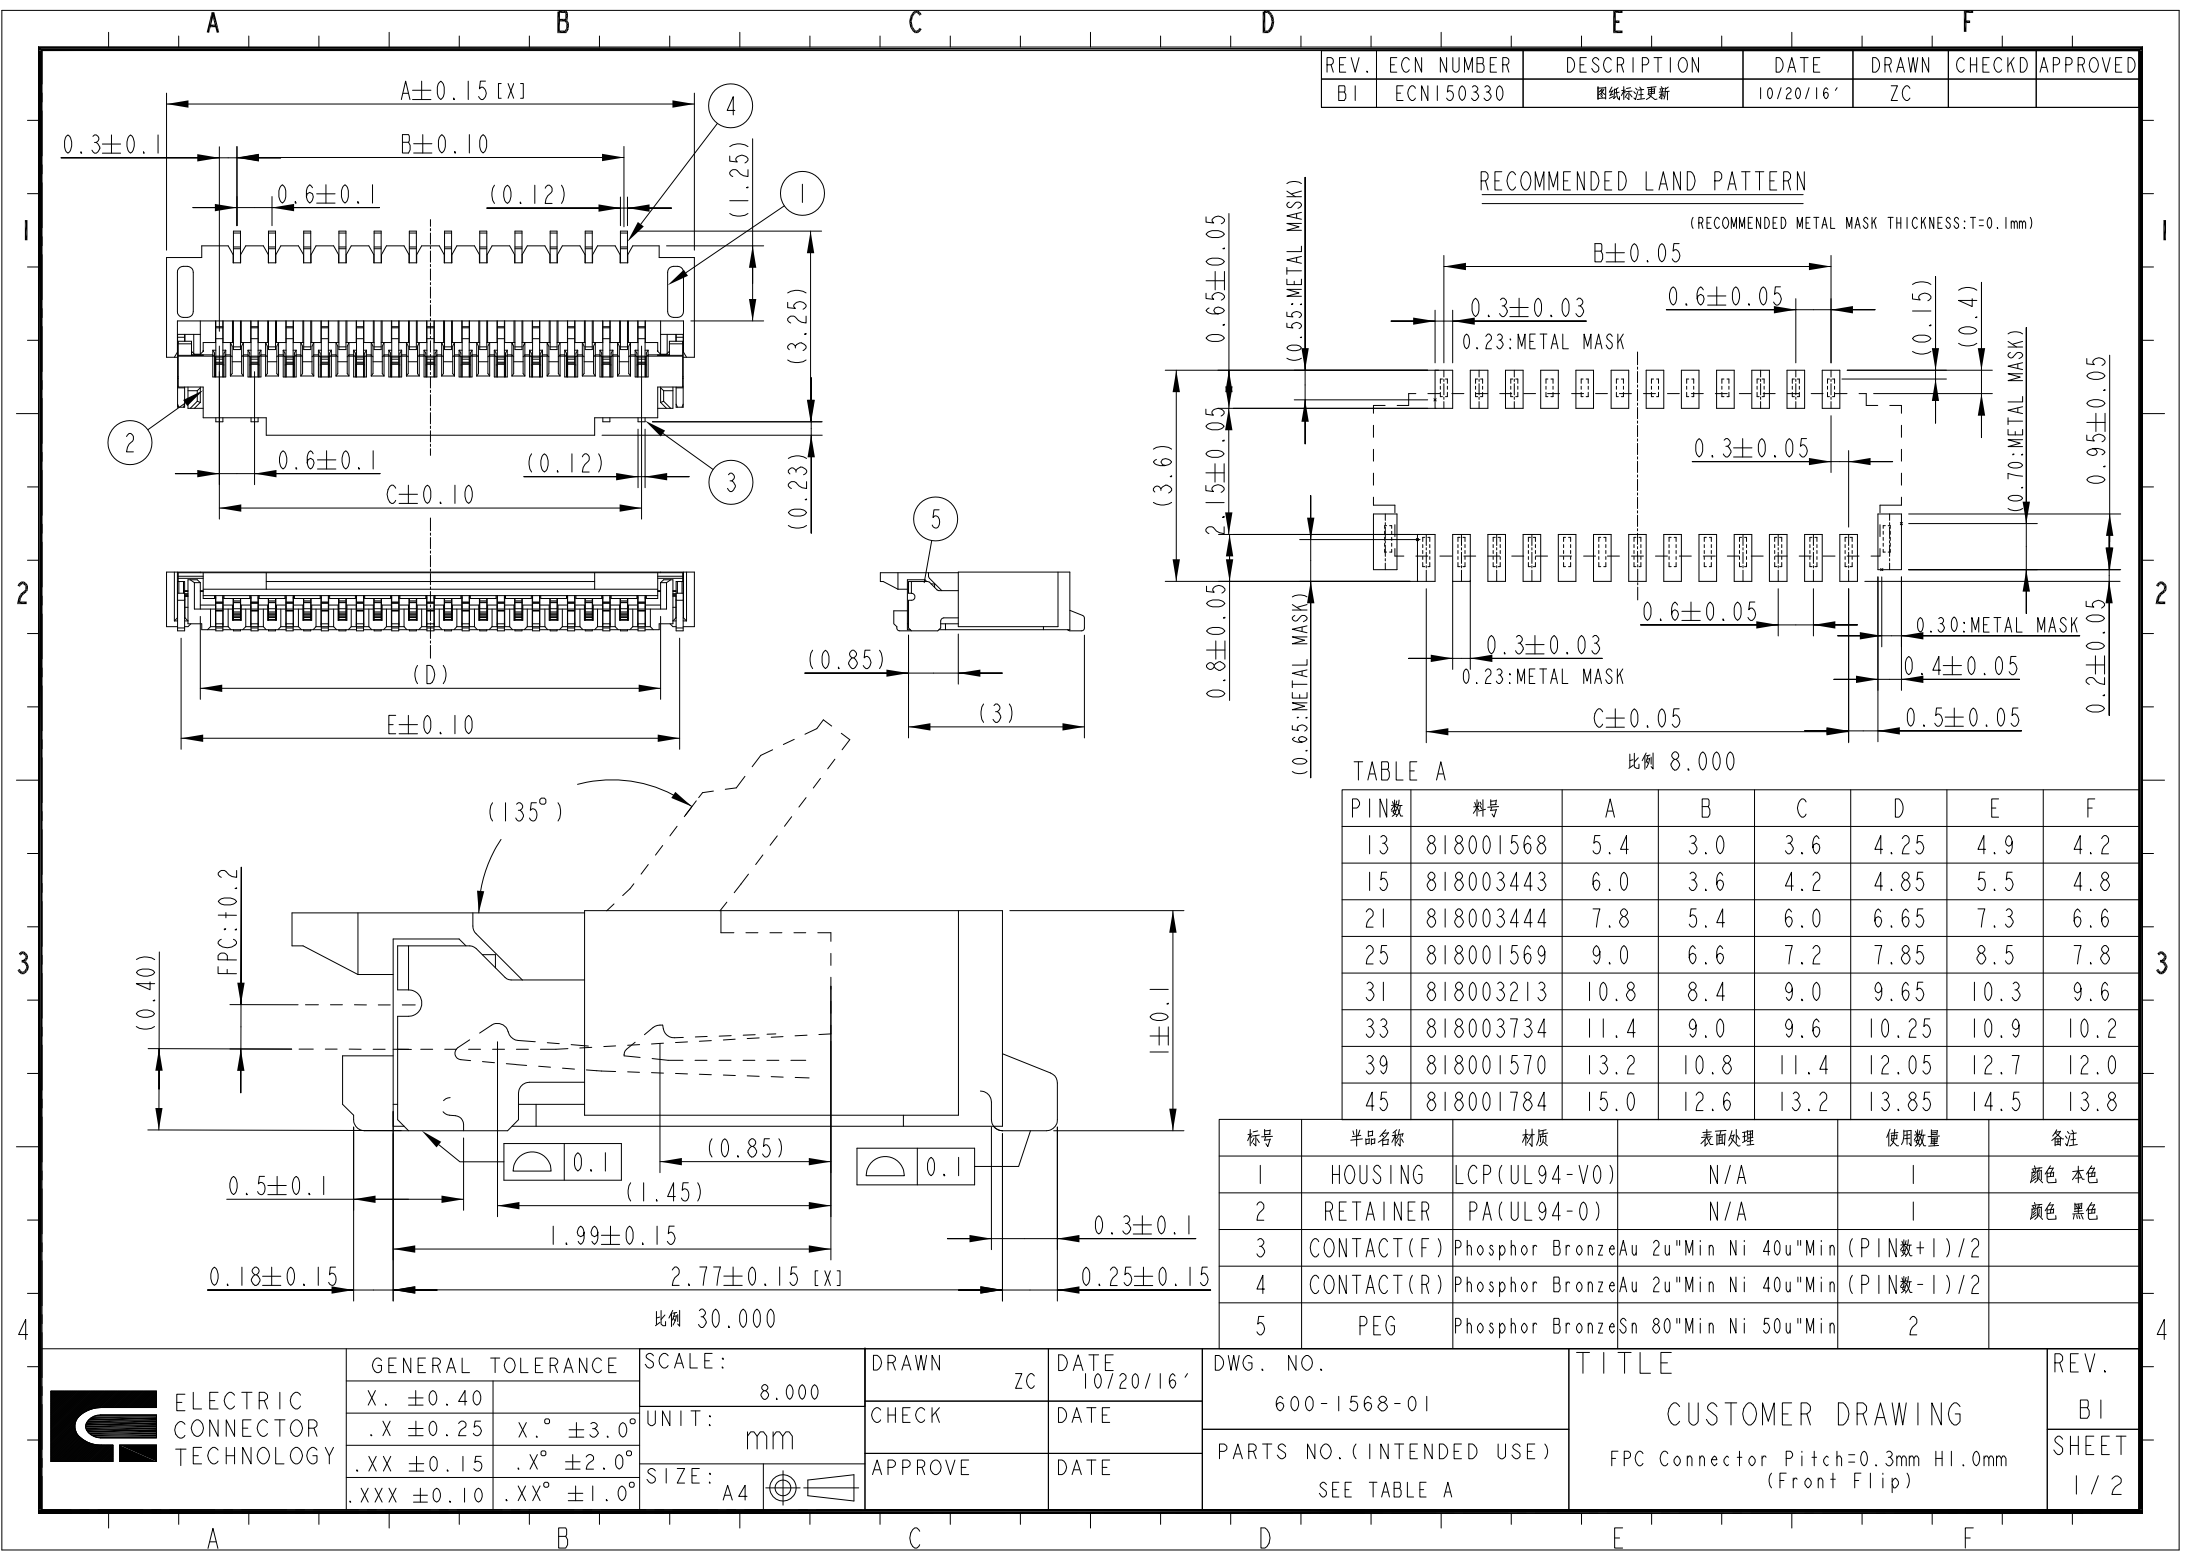

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKD	APPROVED
BI	ECN150330	图纸标注更新	10/20/16	ZC		

RECOMMENDED LAND PATTERN

(RECOMMENDED METAL MASK THICKNESS: T=0.1mm)

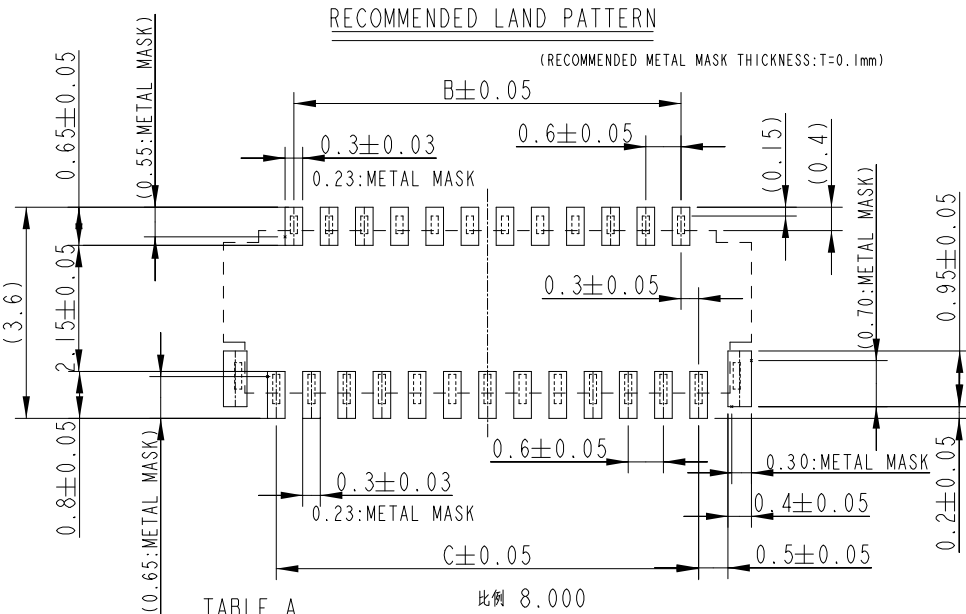


TABLE A 比例 8.000

PIN数	料号	A	B	C	D	E	F
13	818001568	5.4	3.0	3.6	4.25	4.9	4.2
15	818003443	6.0	3.6	4.2	4.85	5.5	4.8
21	818003444	7.8	5.4	6.0	6.65	7.3	6.6
25	818001569	9.0	6.6	7.2	7.85	8.5	7.8
31	818003213	10.8	8.4	9.0	9.65	10.3	9.6
33	818003734	11.4	9.0	9.6	10.25	10.9	10.2
39	818001570	13.2	10.8	11.4	12.05	12.7	12.0
45	818001784	15.0	12.6	13.2	13.85	14.5	13.8

标号	半成品名称	材质	表面处理	使用数量	备注
1	HOUSING	LCP(UL94-V0)	N/A	1	颜色 本色
2	RETAINER	PA(UL94-0)	N/A	1	颜色 黑色
3	CONTACT(F)	Phosphor Bronze	Au 2u"Min Ni 40u"Min	(PIN数+1)/2	
4	CONTACT(R)	Phosphor Bronze	Au 2u"Min Ni 40u"Min	(PIN数-1)/2	
5	PEG	Phosphor Bronze	Sn 80"Min Ni 50u"Min	2	



GENERAL TOLERANCE		SCALE:		DRAWN	DATE	DWG. NO.	TITLE	REV.		
X. ± 0.40		8.000		ZC	10/20/16	600-1568-01	CUSTOMER DRAWING	BI		
.X ± 0.25	X.° $\pm 3.0^\circ$	UNIT:		CHECK	DATE			PARTS NO. (INTENDED USE)	FPC Connector Pitch=0.3mm H1.0mm (Front Flip)	SHEET
.XX ± 0.15	.X° $\pm 2.0^\circ$	mm		APPROVE	DATE					1 / 2
.XXX ± 0.10	.XX° $\pm 1.0^\circ$	SIZE:				SEE TABLE A				

