

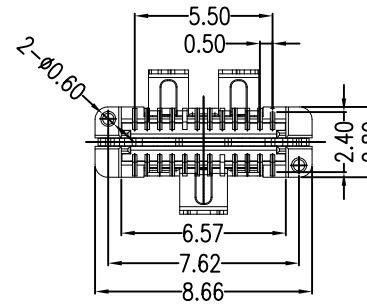
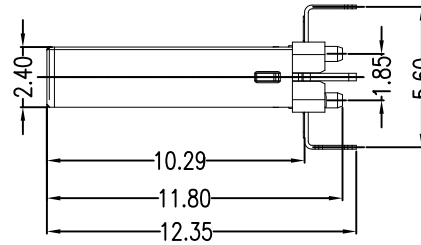
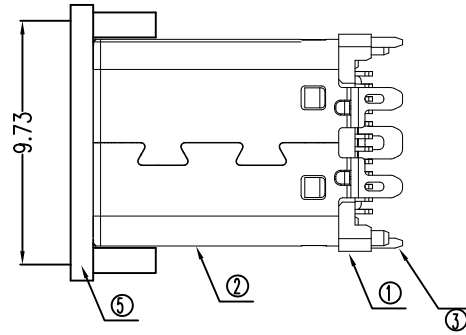
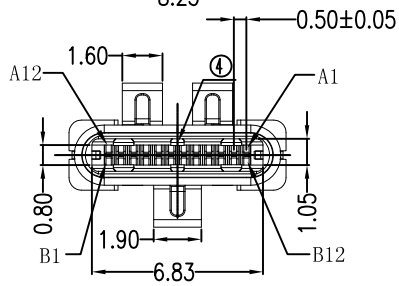


RoHS Compliant

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

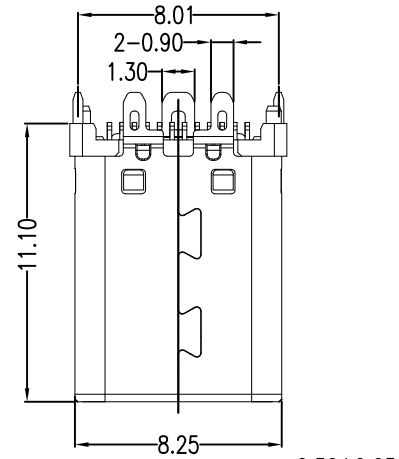

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

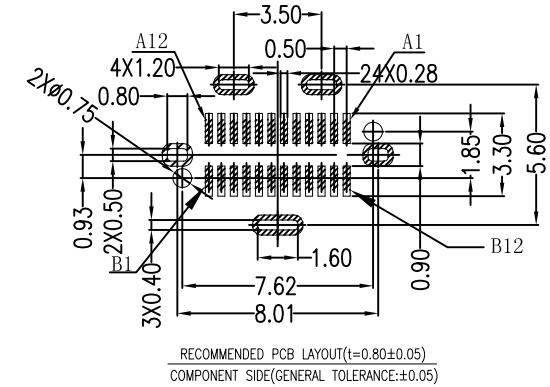

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES

PART NO.:

W 10 24 M2-A-03-X
Series
Pin No.
Flow No.
Packing:
P:PE Bag
R:Reel
Plating:
01:Au G/F
03:Au 3u"

5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PCS
4	SPRING	STAINLESS STEEL	---	2PCS
3	LATCH	STAINLESS STEEL	TIN:80~120u"Min/Ni base:50u"Min Plated	1PCS
2	SHELL	STAINLESS STEEL	Ni:50u"Min Plated	1PCS
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/CONTACT: Au:3u"Min Ni base50u"Min	2PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

X. ± 0.30	APPD: Henry Sun	TITLE: USB TYPE C MALE 立式 三支脚插板	 泰康电子 TECONN
.X ± 0.25	CHKD:	PART NO: W1024M2-A-03-X	
.XX ± 0.15	DR: Drex	DWG NO: C-W1024M2-A-03-X	
X° ± 5°	UNITS: P mm	SCALE: 1:1	
.X° ± 2°	CUSTOMER DRAWING	SHEET: 1 OF 1	
REV: A			

A	TE2018-0070	New Drawing	Drex	2018/05/17
REV	ECN NO	DESCRIPTION	DESIGN	DATE