


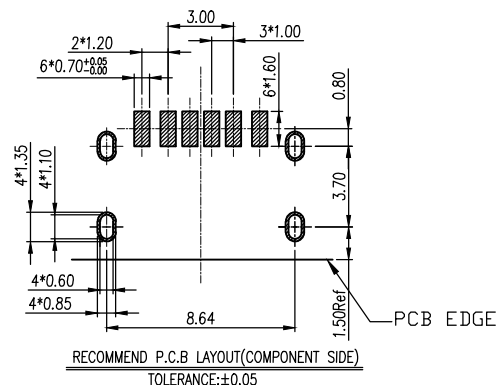






REV	DESCRIPTION	DATE	ECN.NO	CHANGE
A-0	New	19.10.10		Yuxiang

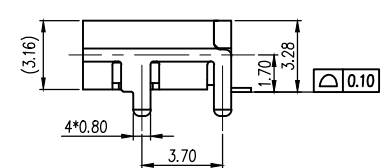

A12	GND
A9	VBUS
A5	CC1
B5	CC2
B9	VBUS
B12	GND
Pin NO.	Signal name



- NOTE:
- 1.MATERIAL:
- 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL94 V-0; Black Color
 - 1.2 CONTACT: COPPER ALLOY. GOLD/Matte Tin PLATED.
 - 1.3 OUTER SHELL:STAINLESS STEEL,Nickel PLATED.
 - 1.4 INNER SHELL:STAINLESS STEEL,Nickel PLATED.
 - 1.5 MID PLATE:STAINLESS STEEL.
- 2.ELECTRICAL CHARACTERISTICS;
- 2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 50mΩ Max AFTER DURABILITY TEST
 - 2.2 CONTACT CURRENT RATING: CONTACT CURRENT RATING: 3A FOR COLLECTIVELY POWER SUPPLY PIN(PINA1,A4,A9,A12, B1,B4,B9,B12);
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - 2.4 INSULATION RESISTANCE 100MΩ Min
 - 2.5 OPERATING TEMPERATURE: -40°C ~ 85°C
- 3.MECHANICAL CHARACTERISTICS:
- 3.1 MATING FORCE: 5~20 N.
 - 3.2 UNMATED FORCE: INITIAL 8~20N; 6~20N AFTER DURABILITY TEST
 - 3.3 DURABILITY: 10,000 CYCLES



CZT®DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

10317106L002	LCP, Black, 5U/Matte tin
PART NUMBER	REMARK

.X ±0.25	X* ±2*	UNIT:	mm	DR:		TITLE:	USB TYPE C 6PIN 母座			
.XX±0.20	.X* ±1*	3RD:	⊕ ⊖	DE:			L=6.80成品 CL=1.70mm			
.XXX±0.05	.XX*	SCALE:	1:1	CHKD:		SHEET:	1/1	P/N:	SEE TABLE	
	.XXX*	CUSTOMER	REV:	A-0	APPD:	D/N:	131A-0062	M/N:		