

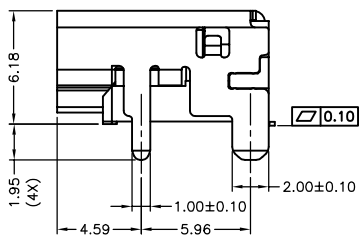

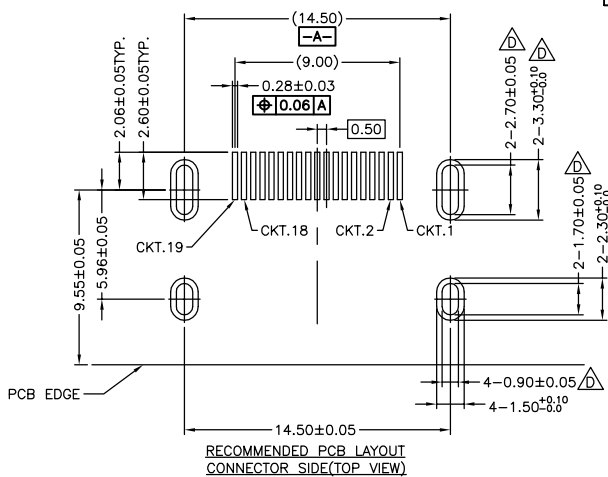


符合泰康"环境相关物质管理规定GP001"

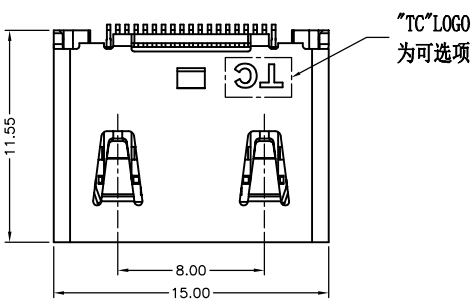

NOTES:
1.MATERIAL AND FINISH SEE THE TABLE.
2.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 44.1N MAX
EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
MATING CYCLE:10000 CYCLES
3.ELECTRICAL CHARACTERISTICS
RATING CURRENT: 0.5A
RATING VOLTAGE: 40V
CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
(EXCLDING CONDUCTOR RESISTANCE)
INSULATION RESISTANCE:
a, UNMATED: 100M OHMS MIN AT 500 VDC
b, MATED: 10M OHMS MIN AT 150 VDC
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/1MINUTE
OPERATING TEPERATURE: -20°C--+85°C
STORAGE TEMPERATURE: -20°C--+65°C

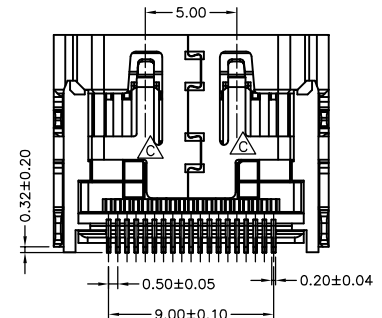

料号信息说明:
A111922-X-XX-X
类别: A:成品
系列码: 11:HDMI-A/F
PIN数码: 19:19PIN
流水码: 10
同类变动码:
C: SHELL WITH "TC" LOGO
D: SHELL WITHOUT LOGO
包装: R:TAPE REEL, T: TRAY
端子接触区电镀: 01: Au 1u", 03: Au 3u", 05: Au 5u", 10: Au 10u", 15: Au 15u", 30: Au 30u"

REV	ECN NO	DESCRIPTION	DESIGN	DATE
D	TE2019-1008	与客户要求尺寸一致	Bingo	2019.10.09
C	TE2010-408	取消肋条	XiaoLiang	2010.06.09
B	TE2010-380	外壳底部弹片修改为5.00mm且加肋条	XiaoLiang	2010.05.28
A	TE2010-247	初版发行	XiaoLiang	2010.04.23

03	端子	T111922-A-XX-A	C2680, T=0.20	镀底镍.接触区见料号说明,尾部雾锡	1set
02	铜壳	K111922-D-ON-A	C2680, T=0.50	镀可焊锡.(无 LOGO)	1
		K111922-C-ON-A	C2680, T=0.50	镀可焊锡.(TC LOGO)	
01	半成品	B111922-A-XX-A	LCP UL94V-0	黑色	1
NO.	名称	料号	材质	电镀/颜色	数量
X. ± XXX	APPD:	Lebon Lee	TITLE:	HDMI-A/F CONN.	客户图 SHEET:10F1 REV: D
.X ± 0.30	CHKD:			普通型 SMT TYPE	
.XX ± 0.25				外壳无凸包	
.XXX ±					
X* ± 2°	DR:	XiaoLiang	PART NO:	A111922-C(D)-XX-X	
.X* ± 1.5°			DWG NO:	C-A111922-C(D)-XX-X	
	UNITS:	mm	SCALE:	NONE	