


符合泰康"环境相关物质管理规定GP001"




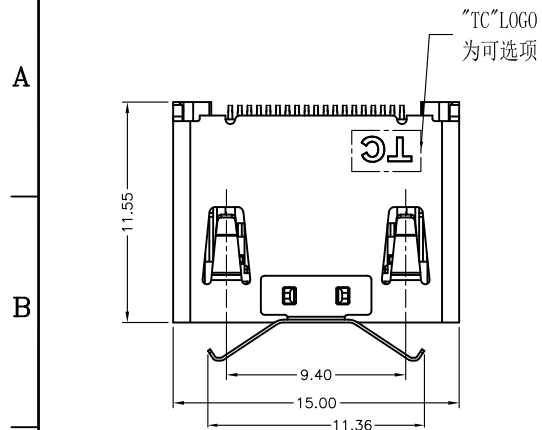


Part NO. information
A111922-X-XX-X

Form
A: ASS'y
series
11: HDMI-A/F
umber of POS.: 19pin
follow NO.: 10
difference type:
2: shell with "tc" logo
3: shell without logo


packing
T: tray
R: tape&reel

Contact area
01: Au 1u"
03: Au 3u"
05: Au 5u"
10: Au 10u"
15: Au 15u"
30: Au 30u"

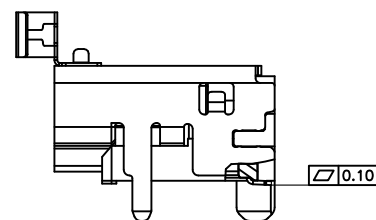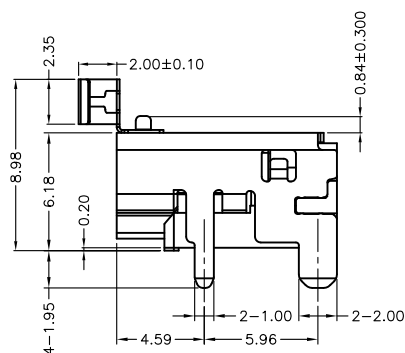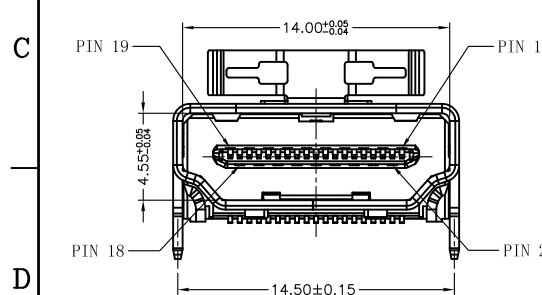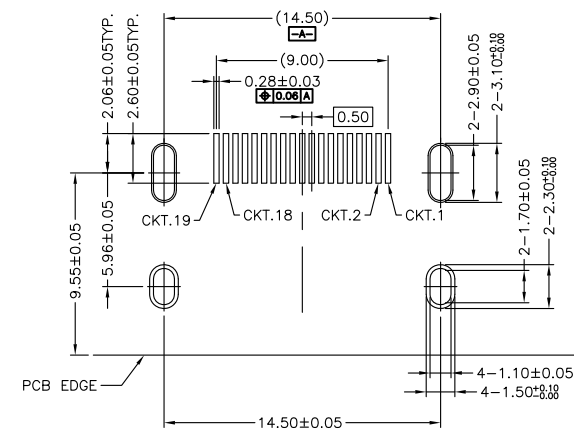

Notes:

1. Material and finish see the table.
2. Mechanical characteristics
Insertion force: 44.1N max
Extraction force: 9.8N min, 39.2N max
Mating cycle: 10000 cycles
3. Electrical characteristics
Rating current: 0.5A
Rating voltage: 40V
Contact resistance: 10 Milliohms ohms max
(Excluding conductor resistance)
Insulation resistance:
a, Unmated: 100M ohms min at 500 VDC
b, Mated: 10M ohms min at 150 VDC
Dielectric withstanding voltage:
500V AC/1minute
Operating teperature: -20°C--+85°C
Storage temperature: -20°C--+65°C

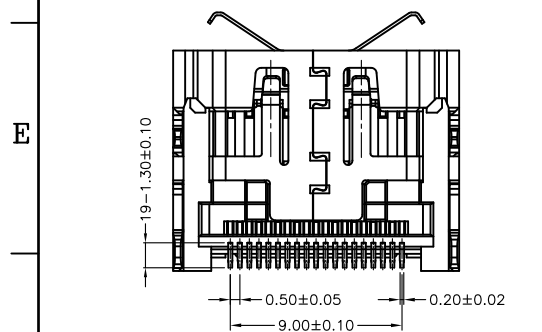

B	TE2013-0154	图面有误	2013.04.17
A	TE2013-0001	初版发行	2013.01.02
REV	ECN NO	DESCRIPTION	DATE

04	shrapnel	K111910-J-00-A	SUS304, T=0.15		1
03	contact	T111922-A-XX-A	C2680, T=0.20	gold plating on contact area see part no. 80u" min matte tin plated on solder tails 50u" min. nickel under plated over all	1set
02	shell	K111922-3-00-A	C2680, T=0.50	solderable Ni 50u" min (without LOGO)	1
		K111922-2-00-A	C2680, T=0.50	solderable Ni 50u" min. (TC LOGO)	1
01	molding	B111922-A-XX-A	LCP (U94V-0)	black	1
NO.	name	part NO.	material	plating/color	note
X.	± 0.30	APPD:	TITLE: HDMI-A/F smt type connector  泰康电子 TECONN		
.X	± 0.25	Knight			
.XX	± 0.20	CHKD:			
.XXX	± 0.15	Knight			
X"	± 2"	DR:			
X"	± 1.5"	Andrew	PART NO: A111922-2(3)-XX-X		
		UNITS:	mm	SCALE:	NONE
		DWG NO:	C-A111922-2(3)-XX-X		
客户图					SHEET: 10F1 REV: B