

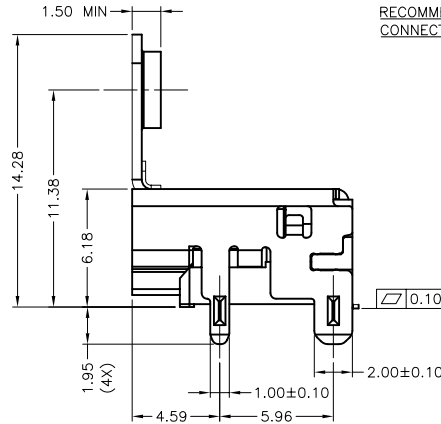
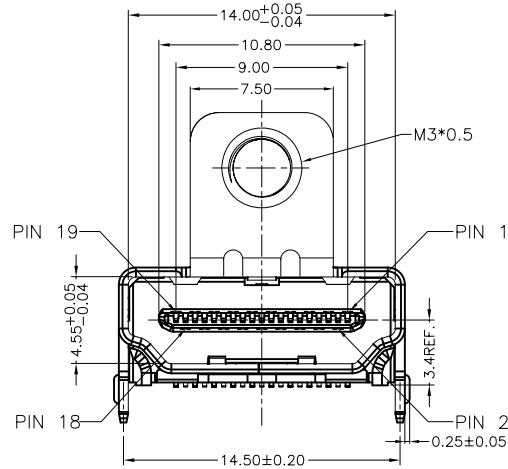
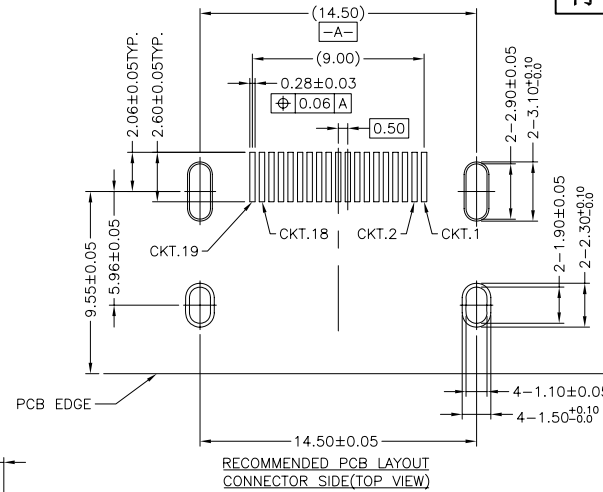


符合泰康“环境相关物质管理规定GP001”

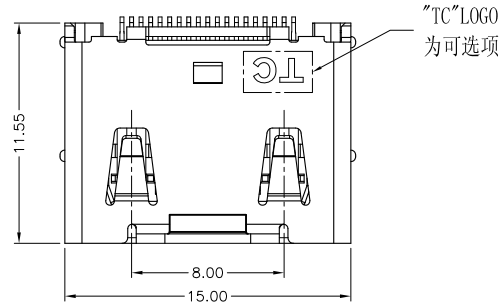

NOTES:
1.MATERIAL AND FINISH SEE THE TABLE.
2.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 44.1N MAX
EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
MATING CYCLE:10000 CYCLES
3.ELECTRICAL CHARACTERISTICS
RATING CURRENT: 0.5A
RATING VOLTAGE: 40V
CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
(EXCLDING CONDUCTOR RESISTANCE)
INSULATION RESISTANCE:
a, UNMATED: 100M OHMS MIN AT 500 VDC
b, MATED: 10M OHMS MIN AT 150 VDC
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/1MINUTE
OPERATING TEPEPERATURE: -20°C--+85°C
STORAGE TEMPERATURE: -20°C--+65°C

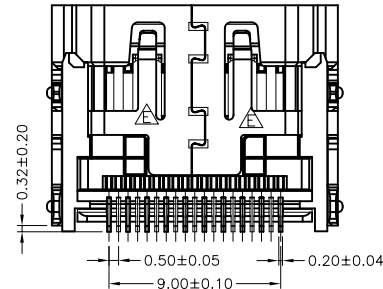

料号信息说明:
A111922-X-XX-X
类别: A:成品
系列码: 11:HDMI-A/F
PIN数码: 19:19PIN
流水码: 22
同类变动码:
A: 外壳铜材, 有"TC"LOGO
B: 外壳铜材, 无"TC"LOGO
E: 外壳铁材, 有"TC"LOGO
包装: R:TAPE REEL, T: TRAY
端子接触区电镀:
01: Au 1u"
03: Au 3u"
05: Au 5u"
10: Au 10u"
15: Au 15u"
30: Au 30u"

03	端子	T111922-A-XX-A	C2680, T=0.20	底镀50u"Min. 接触区见料号说明, 尾部雾锡80u"Min.	1set
02	外壳	K111922-E-0N-A	SPCC, T=0.50	镀可焊锡50u"Min. (TC LOGO)	1
K111922-B-0N-A		C2680, T=0.50	镀可焊锡50u"Min. (无 LOGO)		
K111922-A-0N-A		C2680, T=0.50	镀可焊锡50u"Min. (TC LOGO)		
01	半成品	B111922-A-XX-A	LCP UL94V-0	黑色	1
NO.	名称	料号	材质	电镀/颜色	数量
X. ±		APPD:		TITLE: HDMI-A/F CONN. 普通型 SMT TYPE 外壳脚有凸包  泰康电子 TECONN	
.X ± 0.30		CHKD:			
.XX ± 0.25					
.XXX±					
X' ± 2"		DR:		PART NO:	
.X' ± 1.5"				A111922-A(B E)-XX-X	
		UNITS:		DWG NO:	
		mm		C-A111922-A(B E)-XX-X	
		SCALE:		客户图	
		NONE		SHEET: 1 OF 1	
				REV: E	

E	TE2010-408	取消外壳肋条	2010.06.09
D	TE2010-379	删除成品料号变动码F, 取消下盖	2010.05.28
C	TE2010-320	增加下盖	2010.05.17
B	TE2010-279	新增外壳铁材规格	2010.05.05
A	TE2010-239	初版发行	2010.04.21
REV	ECN NO	DESCRIPTION	DATE