
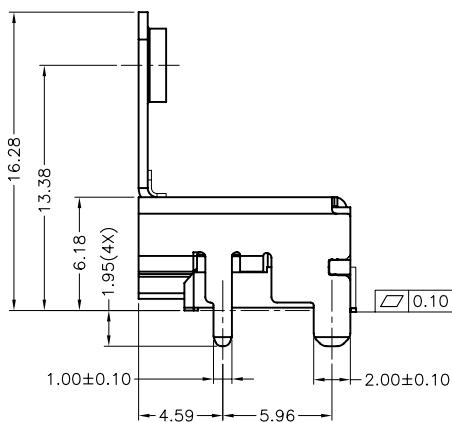
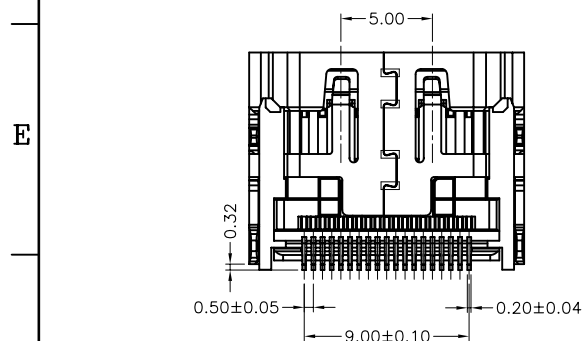
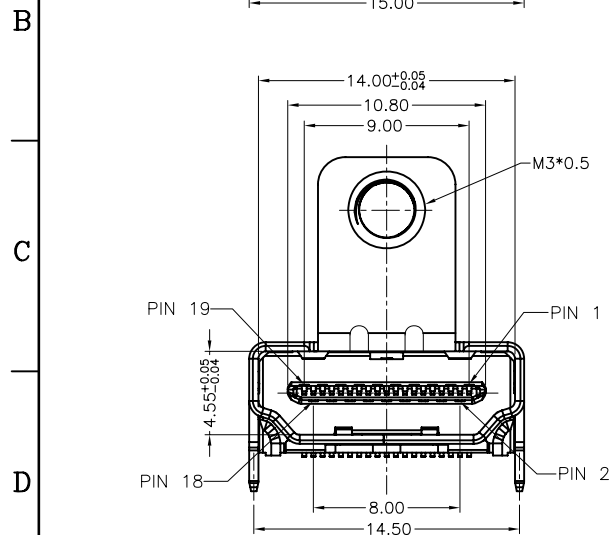


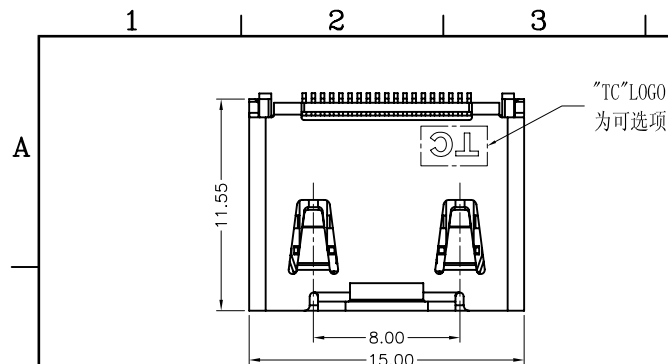

料号信息说明:

A111922-X-XX-T

类别: A:成品

系列码: 11:HDMI-A/F

PIN数码: 19:19PIN

流水码: 22

同类变动码:

T: 外壳SPCC, 有"TC"LOGO

U: 外壳SPCC, 无"TC"LOGO

包装: T: TRAY

端子接触区电镀:

01: Au 1u"

03: Au 3u"


05: Au 5u"

10: Au 10u"

15: Au 15u"

30: Au 30u"

符合泰康"环境相关物质管理规定GP001"

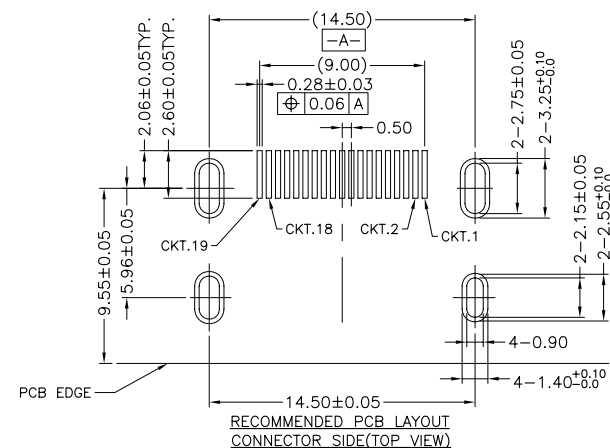

NOTE:

1.MATERIAL AND FINISH SEE THE TABLE.

2.MECHANICAL CHARACTERISTICS

INSERTION FORCE: 44.1N MAX

EXTROCTION FORCE: 9.8N MIN, 39.2N MAX

MATING CYCLE:10000 CYCLES

3.ELECTRICAL CHARACTERISTICS

RATING CURRENT: 0.5A

RATING VOLTAGE: 40V

CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
(EXCLDING CONDUCTOR RESISTANCE)

INSULATION RESISTANCE:

a, UNMATED: 100M OHMS MIN AT 500 VDC

b, MATED: 10M OHMS MIN AT 150 VDC

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC/1MINUTE

OPERATING TEPERATURE: -20°C---+85°C

STORAGE TEMPERATURE: -20°C---+65°C

03	端子	T111922-A-XX-A	C2680, T=0.20	底银50u". 接触区见料号说明, 尾部雾锡120u".	1set
02	外壳	K111922-T-0N-A	SPCC, T=0.50	镀可焊锡50u". (有TC LOGO)	1
		K111922-U-0N-A	SPCC, T=0.50	镀可焊锡50u". (无 LOGO)	
01	半成品	B111922-Y-XX-A	LCP UL94V-0	黑色	1
NO.	名称	料号	材质	电镀/颜色	数量
X. ±		APPD:	TITLE:		 泰康电子 TECONN
.X ± 0.30			HDMI-A/F CONN. SMT MOLDING TYPE		
.XX ± 0.25		CHKD:			
.XXX±			PART NO:		
X' ± 2'		DR:			
.X' ± 1.5"			A111922-T(U)-XX-T		
		UNITS:	SCALE:	客户图	
mm		NONE	DWG NO:	SHEET: 1 OF	
			C-A111922-T(U)-XX-T	REV: A	

A	TE2011-0287	初版发行	2011.06.03
REV	ECN NO	DESCRIPTION	DATE