
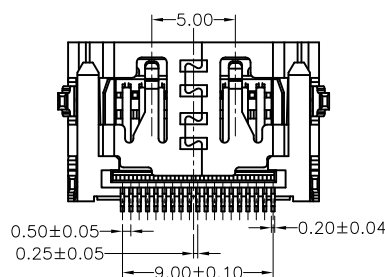

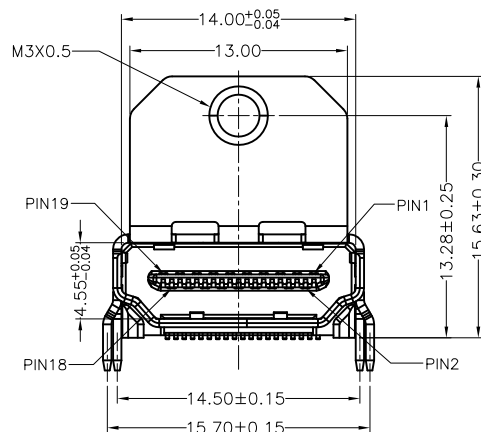
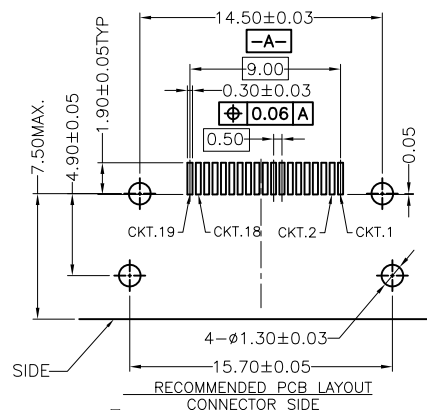


符合泰康"环境相关物质管理规定GP001"



PART NO. INFORMATION

FORM A:ASS'y
SERIES 11:HDMI-A/F
NUMBER OF POS. 19
FOLLOW NO. 89
DIFFERENCE TYPE.
PART NO. A111989-9-**-**
PACKING TYPE R:TAPE REEL
T: TRAY
CONTACT AREA PLATING
01:Au 1u"
03:Au 3u"
05:Au 5u"
10:Au 10u"
15:Au 15u"
30:Au 30u"

NOTE:

- MATERIAL:
HOUSING: HIGH TEMP.THERMOPLASTIC, UL 94V-0
COLOR: BLACK.
CONTACT: COPPER ALLOY, THICKNESS=0.20MM
SHIELD: COPPER ALLOY OR SK7, THICKNESS=0.50MM
- FINISH:
CONTACT: GOLD PLATING ON CONTACT AREA SEE NOTE
SOLDER TAILS PLATED SEE PART NO.
50u" MIN. NICKEL UNDER PLATED OVER ALL
SHIELD: 50u" MIN. NICKEL PLATED OVER ALL
- MECHANICAL CHARACTERISTICS
INSERTION FORCE: 44.1N MAX
EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
MATING CYCLE:10000 CYCLES
- ELECTRICAL CHARACTERISTICS
RATING CURRENT: 0.5A
RATING VOLTAGE: 40V
CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
(EXCLUDING CONDUCTOR RESISTANCE)
INSULATION RESISTANCE:
a, UNMATED: 100M OHMS MIN AT 500 VDC
b, MATED: 10M OHMS MIN AT 150 VDC
DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/1MINUTE
OPERATING TEMPERATURE: -20°C--+85°C
STORAGE TEMPERATURE: -20°C--+65°C

A	TE2012-0035	New Drawing	2012/02/13
REV	ECN NO	DESCRIPTION	DATE

03	CONTACT	T111989-A-XX-A	C2680 T=0. 20	GOLD PLATING ON CONTACT AREA SEE PART NO. 80u"MIN MATTE TIN PLATED ON SOLDER TAILS 50u" MIN. NICKEL UNDER PLATED OVER ALL	1SET
02	SHELL	K111989-9-0N-A	C2680 T=0. 50	NICKEL 50u" Min. WITH"TC" Logo	1
01	MOLDING	B111989-A-XX-A	LCP	UL94V-0 BLACK	1
NO.	NAME	PART NO.	MATERIAL	FINISH/COLOR	Q' TY
X. ±		APPD:	TITLE:		 泰康电子 TECOM
.X ± 0.25		CHKD:	HDMI-A-19P-F/Short/With Screw /Have Cover/InsertMold		
.XX ± 0.20					
.XXX±					
X' ± 2.5'		DR:	PART NO:		
.X' ± 2'		Beny Fan		A111989-9-**-*	
		UNITS:	SCALE:	DWG NO:	SHEET:10F
		mm	1:1	Customer Drawing C-A111989-9-**-*	REV: A