
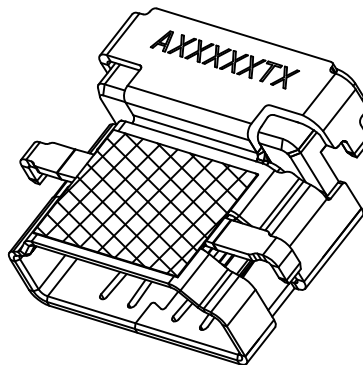


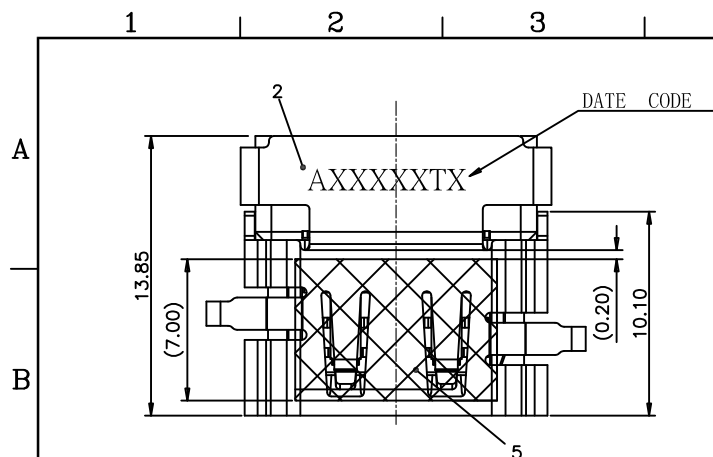

NOTE:

1.MECHANICAL CHARACTERISTICS

INSERTION FORCE: 4.5Kgf MAX

EXTRACTION FORCE: 1.0-4.0Kgf

LIFE TEST :10000 CYCLES

2.ELECTRICAL CHARACTERISTICS

RATING CURRENT: 0.5A

RATING VOLTAGE: 40V




CONTACT RESISTANCE: 30 MILLIOHMS MAX

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE

3.OTHER GENERAL SPEC. TO REFER "HAMI SERIES SPEC";

4.PACKAGING:SEE PACKAGE SPEC;

5.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

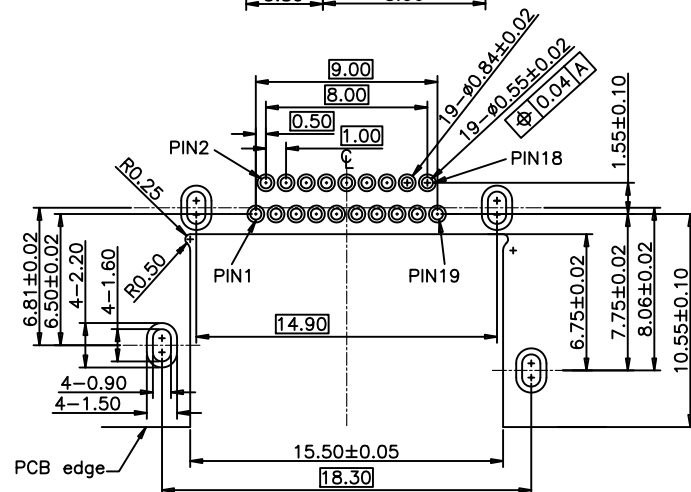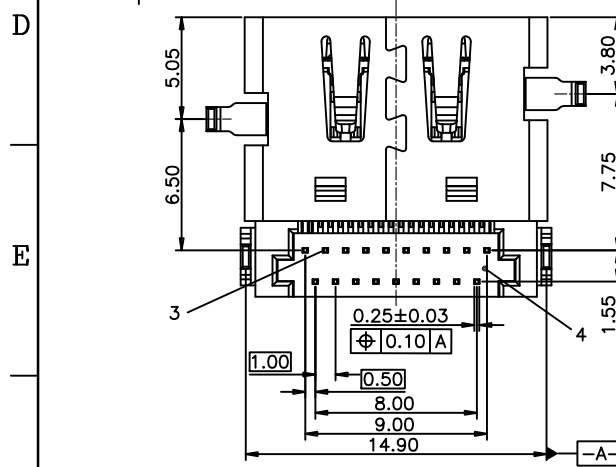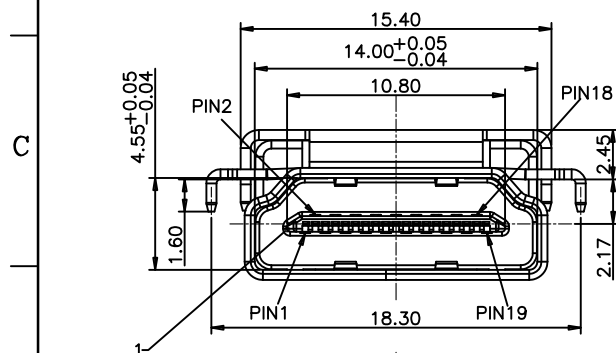

Recommended PCB LAYOUT(TOP VIEW)


Thickness=1.2^{±0.10}mm

Tolerance=±0.05mm

Form A:ASS'y
series 11:HDMI-A/F
number of POS.:19
follow NO.:C3
difference type:E

A1119C3-E-XX-R
packing type R: reel
contact area plating
01:Au 1u"
03:Au 3u"
05:Au 5u"
10:Au 10u"
15:Au 15u"
30:Au 30u"

NO.	Name	Material	Finish/colour	Qty'
5	Mylar	KAPTON FILM		1
4	Cover	LCP UL94V-0	Black	1
3	Contact	Copper alloy	See part number	1
2	Shell	Copper alloy	Plating Ni 50u"Min.	1
1	Housing	LCP UL94V-0	Black	1
NO.	Name	Material	Finish/colour	Qty'

X. ±	APPD:	TITLE:	
.X ± 0.25	Knight Zhang	HDMI A TYPE FEMAL /DIP TYPE(SINKING)	
.XX ± 0.15	CHKD:		
.XXX ±	Knight Zhang		
X' ± 3"	DR:		
.X' ± 2"	Michael	PART NO: A1119C3-E-XX-R (ACES P/N:59039-01901-001)	客户图 SHEET:10F1
	UNITS: mm	SCALE: 1:1	REV:A

REV	ECN NO	DESCRIPTION	DATE
A	TE2013-0478	Initial released	11/06/2013