

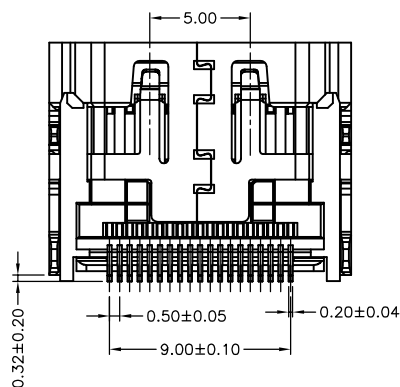
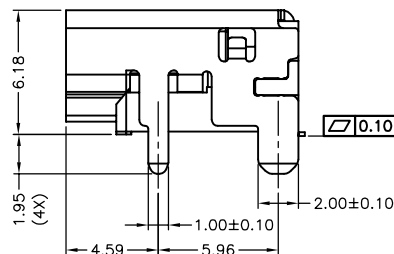
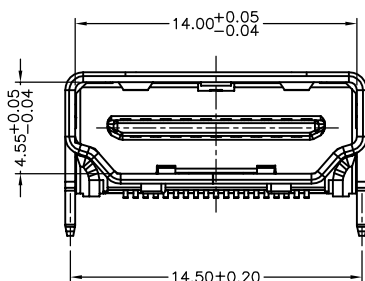



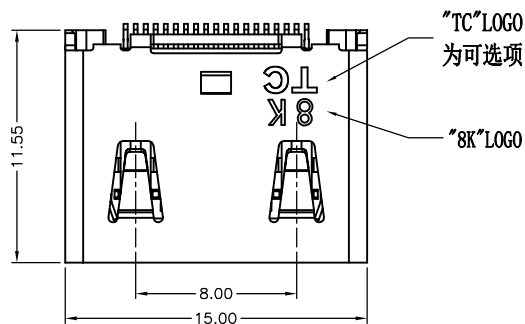

料号信息说明: A111916-X-XX-X

类别: A: 成品
系列码: 11: HDMI-A/F
PIN 数: 19: 19PIN
流水码: 16
同类变动码: A: SHELL WITH "TC" LOGO
B: SHELL WITHOUT "TC" LOGO
包装: R: TAPE REEL
T: TRAY
端子接触区电镀: 01: Au 1u"
03: Au 3u"
05: Au 5u"
10: Au 10u"
15: Au 15u"

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

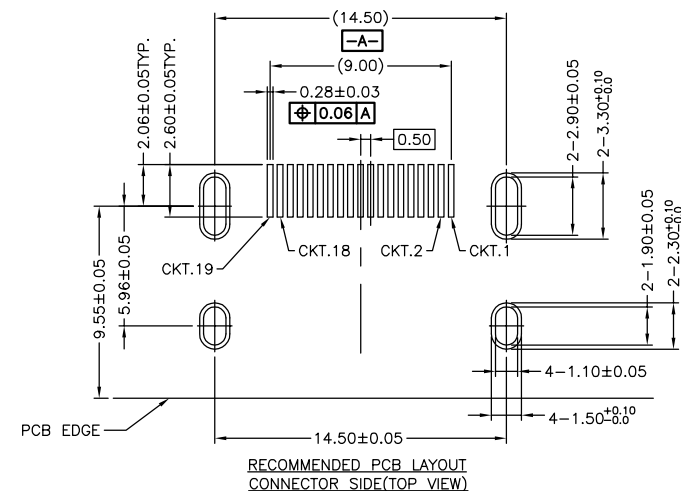

NOTES:

- MATERIAL AND FINISH SEE THE TABLE.
- MECHANICAL CHARACTERISTICS
INSERTION FORCE: 44.1N MAX
WITHDRAWAL FORCE: 9.8N MIN, 39.2N MAX
MATING CYCLE: 10000 CYCLES
- ELECTRICAL CHARACTERISTICS
RATING CURRENT: 0.5A
RATING VOLTAGE: 40V AC
CONTACT RESISTANCE: 10 MILLIOHMS MAX
(EXCLUDING CONDUCTOR RESISTANCE)
INSULATION RESISTANCE:
a, UNMATED: 100M OHMS MIN AT 500V DC
b, MATED: 10M OHMS MIN AT 150V DC
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/1MINUTE
OPERATING TEMPERATURE: -20°C--+85°C
STORAGE TEMPERATURE: -20°C--+65°C

Item	Title	Material	Dispose	Remark
1	Terminal	Copper Alloy	Mating Area: See P/N Solder Tails: Sn	t=0.20
2	Insert Molding	High Temperature	UL94V-0	Black
3	Shell	Copper Alloy	Ni: 50u" Min.	t=0.50

X. ± 0.35	APPD: Lebon Lee	TITLE: HDMI2.1-A/F CONN. SMT TYPE	
.X ± 0.25	CHKD: /	PART NO: A111916-A(B)-XX-X	
.XX ± 0.15	DR: Cola Lee	DWG NO: C-A111916-A(B)-XX-X	
.XXX ±	UNITS: mm	SCALE: 1:1	
X' ± 2"		CUSTOMER DRAWING	SHEET: 10F1
X' ± 1.5"			REV: A

A	TE2019-00XX	New Drawing	Cola	2019/05/15
REV	ECN NO	DESCRIPTION	DESIGN	DATE