

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

A



B

C




D

E

F

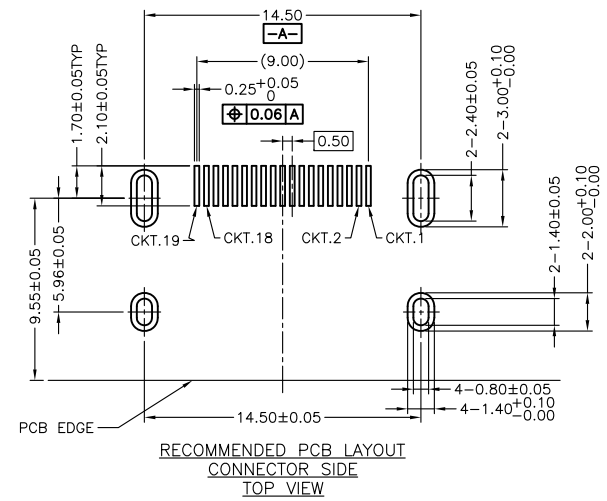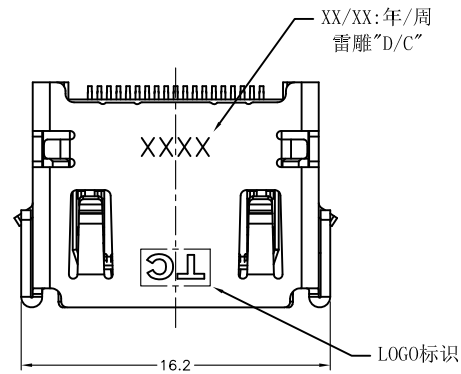

NOTE:
1.MATERIAL AND FINISH SEE THE TABLE.
2.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 44.1N MAX
EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
MATING CYCLE:10000 CYCLES
3.ELECTRICAL CHARACTERISTICS
RATING CURRENT: 0.5A
RATING VOLTAGE: 40V
CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
(EXCLDUING CONDUCTOR RESISTANCE)
INSULATION RESISTANCE:
a, UNMATED: 100M OHMS MIN AT 500 VDC
b, MATED: 10M OHMS MIN AT 150 VDC
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/1MINUTE
OPERATING TEPERATURE: -20°C--+85°C
STORAGE TEMPERATURE: -20°C--+65°C

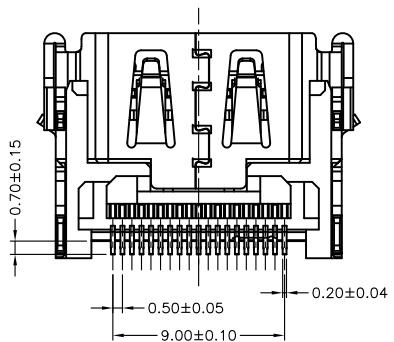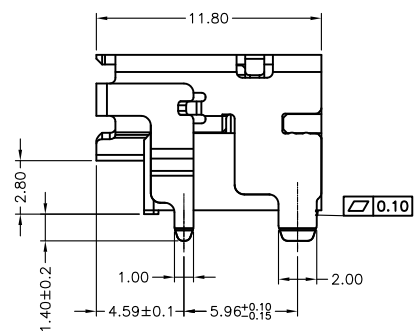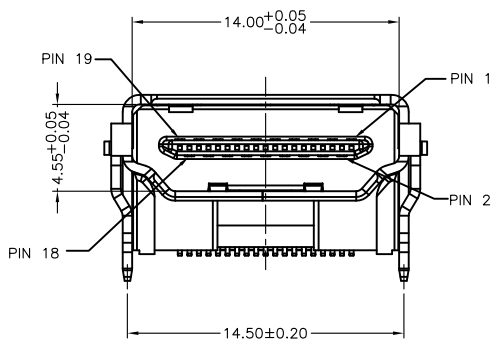


料号信息说明:

类别: A:成品
系列码: 11:HDMI-A/F
PIN数码: 19:19PIN
流水码: 10
同类变动码: 7: 外壳有"TC"LOGO, 外壳脚长1.4mm

包装: R:TAPE & REEL
T:TRAY

端子接触区电镀:
01:Au 1u"
03:Au 3u"
05:Au 5u"
10:Au 10u"
15:Au 15u"
30:Au 30u"

Item	Title	Material	Dispose	Remark
1	Terminal	Copper Alloy	Mating Area:See P/N Solder Tails:Sn	t=0.20
2	InsertMolding	LCP	UL94V-0	Black
3	Shell	Copper Alloy	Ni:50u" Min.	t=0.50

X. ± 0.35	APPD:	TITLE:			
.X ± 0.30		HDMI-A/F CONN.			
.XX ± 0.25	CHKD:	加高型 SMT TYPE			
.XXX±		尾部无挡板, 铜壳脚长1.4			
X* ± 2°	DR:	PART NO:	泰康电子 TECONN		
X* ± 1.5°	Cola Lee	A111910-7-XX-X			
	UNITS: mm	SCALE: 1:1	DWG NO: C-A111910-7-XX-X	CUSTOMER DRAWING	SHEET:10F1
					REV: A

A	TE2017-XXXX	初版发行	2017.07.28
REV	ECN NO	DESCRIPTION	DATE