
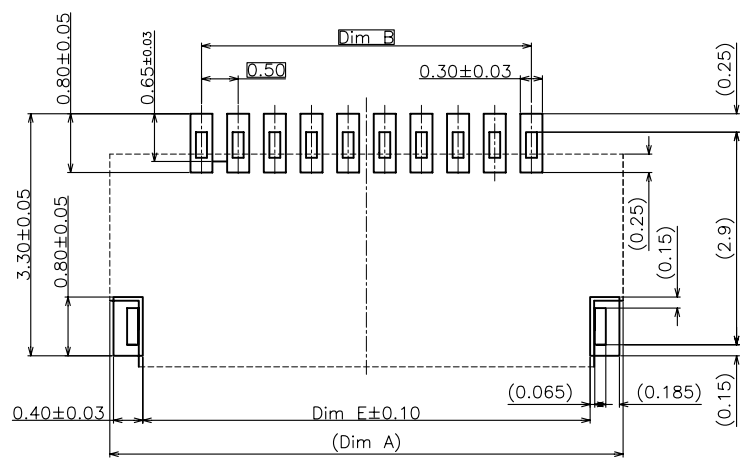
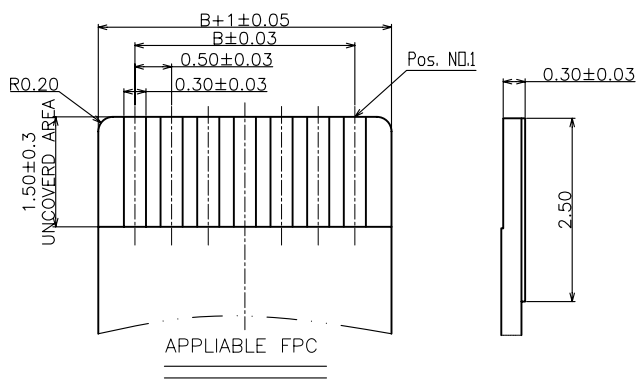
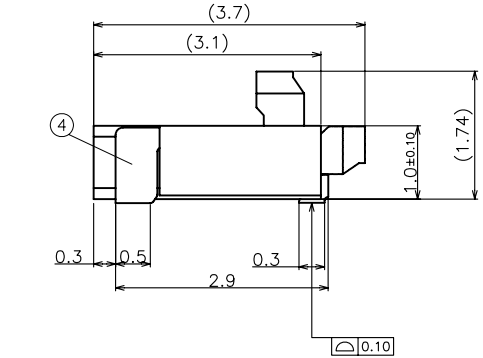
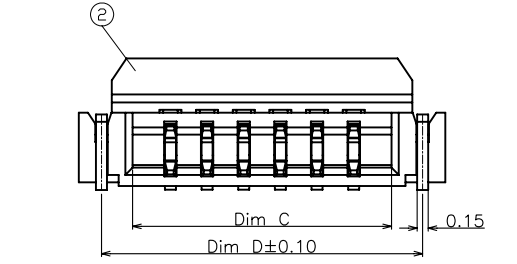


A B C D E F

Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved
A	ECN140256	FIRST RELEASE	2014/03/25	WBCH		姚渊

NOTES: UNLESS OTHERWISE SPECIFIED
1.MATERIAL AND FINISH
1.1 HOUSING :HIGH TEMP THERMO PLASTIC. (UL94V-0)
1.2 RETAINER :HIGH TEMP THERMO PLASTIC. (UL94V-0)
1.3 CONTACT:COPPER ALLOY 50u" MIN. NICKEL UNDERPLATE OVER ALL. GOLD PLATING
1.4 PEG :COPPER ALLOY 50u" MIN. NICKEL UNDERPLATE OVER ALL. TIN PLATING OVER ALL
2. 遵守RoHS指令, 有害物质需符合ECT环保禁用物质管控标准:

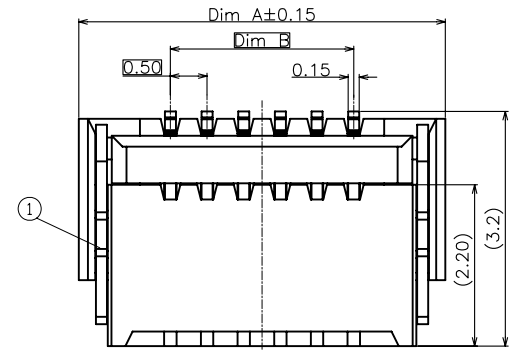

RECOMMENDED PCB LAYOUT

Recommended metal mask thickness: 0.10mm

P/N	CKT	Dim A	Dim B	Dim C	Dim D	Dim E
818003188	4	4.00	1.50	2.53	3.38	3.10
	5	4.50	2.00	3.03	3.88	3.60
818002390	6	5.00	2.50	3.53	4.38	4.10
	7	5.50	3.00	4.03	4.88	4.60
818003189	8	6.00	3.50	4.53	5.38	5.10
	9	6.50	4.00	5.03	5.88	5.60
818002391	10	7.00	4.50	5.53	6.38	6.10
	11	7.50	5.00	6.03	6.88	6.60
	12	8.00	5.50	6.53	7.38	7.10
	13	8.50	6.00	7.03	7.88	7.60
	14	9.00	6.50	7.53	8.38	8.10
	15	9.50	7.00	8.03	8.88	8.60
	16	10.00	7.50	8.53	9.38	9.10
	17	10.50	8.00	9.03	9.88	9.60
	18	11.00	8.50	9.53	10.38	10.10
	19	11.50	9.00	10.03	10.88	10.60
	20	12.00	9.50	10.53	11.38	11.10
	21	12.50	10.00	11.03	11.88	11.60
	22	13.00	10.50	11.53	12.38	12.10
	23	13.50	11.00	12.03	12.88	12.60
	24	14.00	11.50	12.53	13.38	13.10
	25	14.50	12.00	13.03	13.88	13.60
	26	15.00	12.50	13.53	14.38	14.10
	27	15.50	13.00	14.03	14.88	14.60
	28	16.00	13.50	14.53	15.38	15.10
	29	16.50	14.00	15.03	15.88	15.60
	30	17.00	14.50	15.53	16.38	16.10

ECT
Electric Connector
Technology Co., Ltd.
电连精密技术有限公司

GENERAL TOLERANCE	
X. ±0.40	
.X ±0.25	X° ±3.0°
.XX ±0.15	.X° ±2.0°
.XXX ±0.05	.XX° ±1.0°

SCALE: 1:1
UNIT: mm
SIZE: A4

DRAWN Weibingchang
CHECK
APPROVE

DATE 2015.03.06
DATE
DATE

DWG. NO. 600-2390-01
PARTS NO.(INTENDED USE) SEE TABLE A

TITLE
Customer Drawing
0.5mm Pitch FPC CONNECTOR (Back Flip)

REV. A
SHEET 1/1

A B C D E F