

RoHS2.0&REACH Compliant

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.

NOTES:

1. MATERIAL: SEE "TABLE 1";

2. FINISH: SEE "TABLE 1";

3. ELECTRICAL :

3-1.CONTACT CURRENT RATING :

5A(VBUS PIN 1.5A/PIN),

5A(GND PIN 1.25A/PIN MAX),0.25A/PIN(OTHER PIN).

3-2.INSULATION RESISTANCE :

100 MEGAOHMS MIN. AT 250VDC.

3-3.DIELECTRIC WITHSTANDING VOLTAGE :

100VAC MIN.

3-4.LOW LEVEL CONTACT RESISTANCE :

INITIAL 40mΩ MAX.

AFTER 50mΩ MAX.

4.MECHANICAL CHARACTERISTICS :

4-1. MATING FORCE: 5~20N.;

4-2. UNMATING FORCE: 8~20N(INITIAL),6~20N(AFTER 10000 CYCLES);

4-3.DURABILITY : 10,000 MATING CYCLES.

4-4.OPERATING TEMPERATURE : -40°C TO +80°C

5.Waterproofing Grade: IPX7

Part No.:

W1024F7-D-15-R

Pin No.

Flow No.


Packing:

R: Reel








Plated:

15: Au 15u"

TABLE 1:

⑨	Waterproof Ring	1	硅胶	BLACK;	
⑧	GLUE WATER	1	EPOXY	BLACK;	
⑦	Shell-2	1	Stainless steel	NI PLATING;	T=0.20mm
⑥	Shell-1	1	Stainless steel	NI PLATING;	T=0.20mm
⑤	GND PLATE	1	Stainless steel	NI PLATING;	T=0.10mm
④	MID PLATE	1	Stainless steel		T=0.15mm
③	Terminal-B	12	铜镍硅合金	接触镀金15u"	T=0.12mm
②	Terminal-A	12		焊接区域镀金1u"	T=0.12mm
①	Housing	1	HIGH TEMP	Black	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
X. ± 0.35	APPD:	Henry Sun		TITLE: USB 3.1 CF WATERPROOF CL=0.30 沉板1.40mm DIP TYPE	 泰康电子 TECONN
.X ± 0.25	CHKD:				
.XX ± 0.15	DR: Zhangjing	PART NO: W1024F7-D-15-R			
.XXX±					
X* ± 2°	UNITS: mm	SCALE: 1:1	DWG NO: C-W1024F7-D-15-R	CUSTOMER DRAWING	SHEET:10F2 REV: A
.X* ± 1.5°					
					


Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

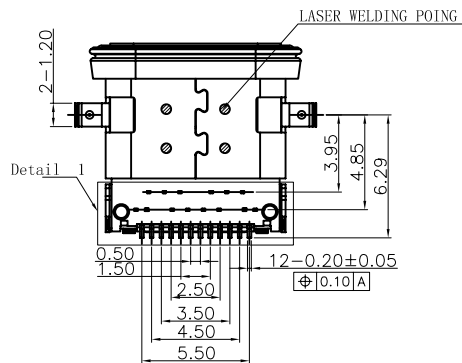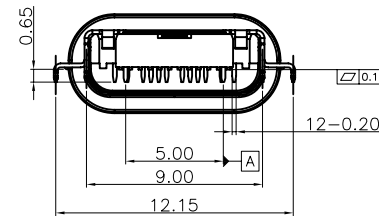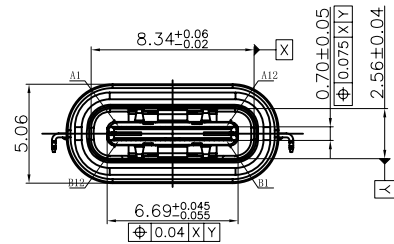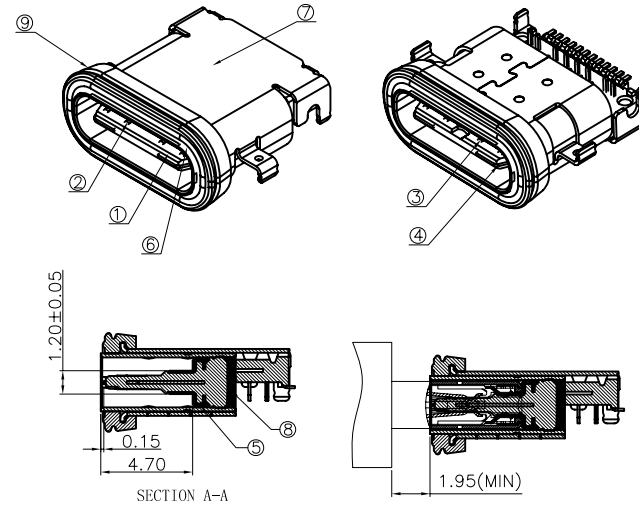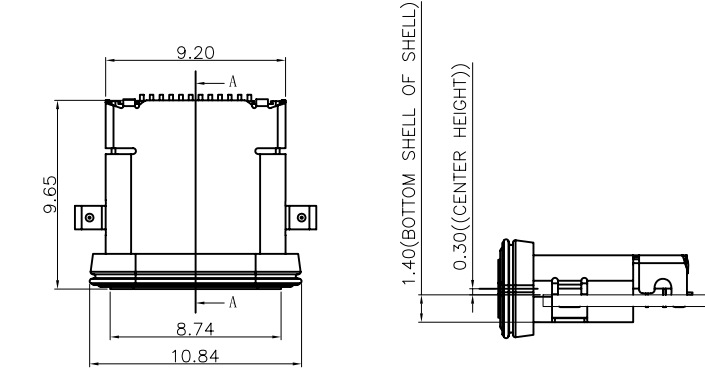

REV	ECN NO	DESCRIPTION	DESIGN	DATE
A	TE2018-XXXX	New Drawing	Zhangjing	2018/08/22

RoHS2.0&REACH Compliant

THE PART MEETS TECONN "GP001" COMPLIANCE NEW REV.


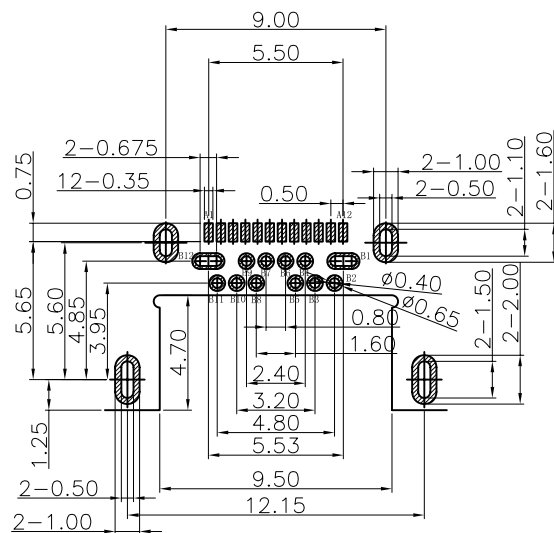


RECOMMENDED P.C.B LAYOUT(Both sides are sample)
Tolerance:±0.05,Thickness=0.60mm



Waterproofing Grade: IPX7

建议密封方式

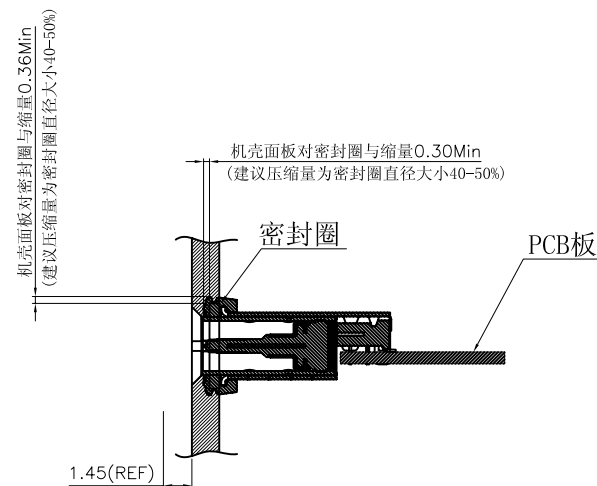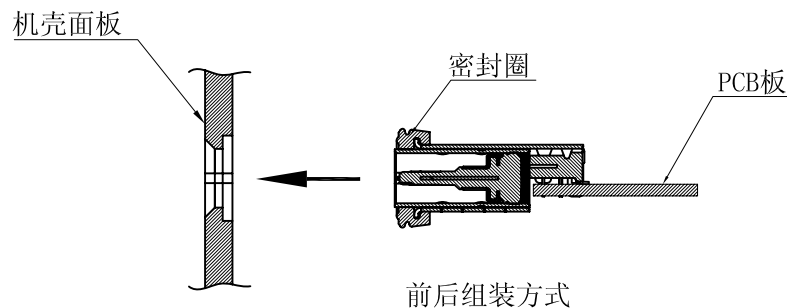

组装面板后公母头对插示意图

REV	ECN NO	DESCRIPTION	DESIGN	DATE
A	TE2018-XXXX	New Drawing	Zhangjing	2018/08/22

X. ± 0.35	APPD: Henry Sun	TITLE: USB 3.1 CF WATERPROOF CL=0.30 沉板1.40mm DIP TYPE	 泰康电子 TECONN
.X ± 0.25	CHKD:	PART NO: W1024F7-D-15-R	
.XX ± 0.15	DR: Zhangjing	DWG NO: C-W1024F7-D-15-R	
.XXX±		CUSTOMER DRAWING	
X° ± 2°	UNITS: mm	SCALE: 1:1	SHEET: 10F2
.X° ± 1.5°			REV: A